

CD11416-LED-13-AGB/CD11417-LED-13-PN/CD11418-LED-13-SBB Assembly and Installation Instructions

WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All Wood that you screw into must be secured to cross beams/celling joists behind the drywall). THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX

ASSEMBLY INSTRUCTIONS - Chandelier

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.

- | | |
|--------------------------------------|---------------------|
| A. Mounting Plate (1) | G. Crystal Cap (1) |
| B. Mounting Screws (2) | H. Thread Ring (1) |
| C. Wire Connectors (3) | I. Nut (2) |
| D. Canopy Cover (1) | J. Safety Cable (1) |
| E. 3" Rod (1) 6" Rod (1) 12" Rod (3) | K. Fixture Body (1) |
| F. Expansion Anchor Bolt (2) | M. Crystal (13) |

2. Pre-plan, make sure all Warnings and Cautions above have been completed.

3. Connect the 3" rod, 6" rod and 12" rod (E) in sequence, have the power cable run through the connected rod, thread ring (H), canopy cover (D) and mounting plate (A), then screw the connected rod onto fixture body (K) and screw the other end to swivel of mounting plate (A).


4. Assemble the mounting plate (A) onto the junction box using installation screws (B) (F) (I). Connect and secure the safety wire rope (J) inside the junction box.

5. Before connecting the input wires coming out of the electrical box, connect the wires from the LED driver output of the ceiling canopy to the wires on the fixture body per the labels affixed on the cables.

6. Now mount the fixture body (K) to the ceiling. Twist and join the corresponding wires together using wire connectors (C): Line L (black), Neutral N (white), and Ground (bare brass). Match and connect them to the corresponding line, neutral and ground wires inside the electrical box.

7. Have the (G) crystal cap pass through the swivel and fixing (D) canopy cover to mounting plate with (H) thread ring.

8. You are now complete and can install (M) crystal by rotating.

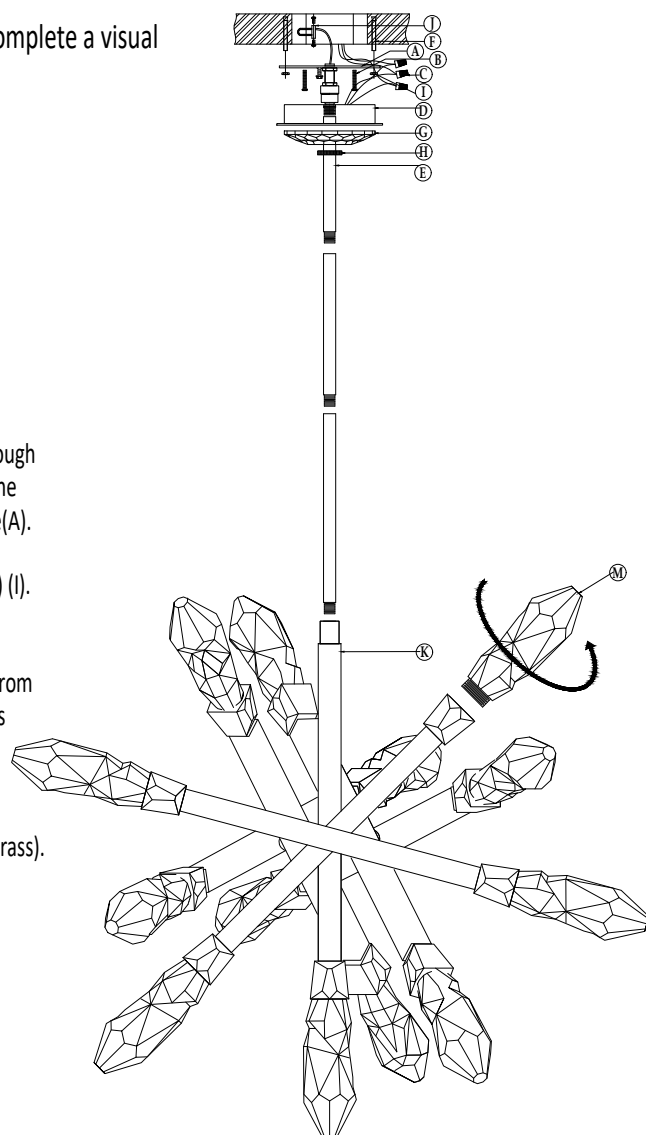

NOTE: This product is equipped with a 3 color temperature switch, adjustable among 3000K 3500K 4000K. After completing step 6, adjust to your preferred color temperature.

CD11416-LED-13-AGB/CD11417-LED-13-PN/CD11418-LED-13-SBB Assembly and Installation Instructions

Detailed wire connection drawing
(Connect the wires on canopy to the wires on fixture body marked with same labels accordingly.)

