


ZEDV

L I G H T I N G

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ITEM NO.: CD10303-12 / AGB


ITEM NO.: CD10304-12 / PN

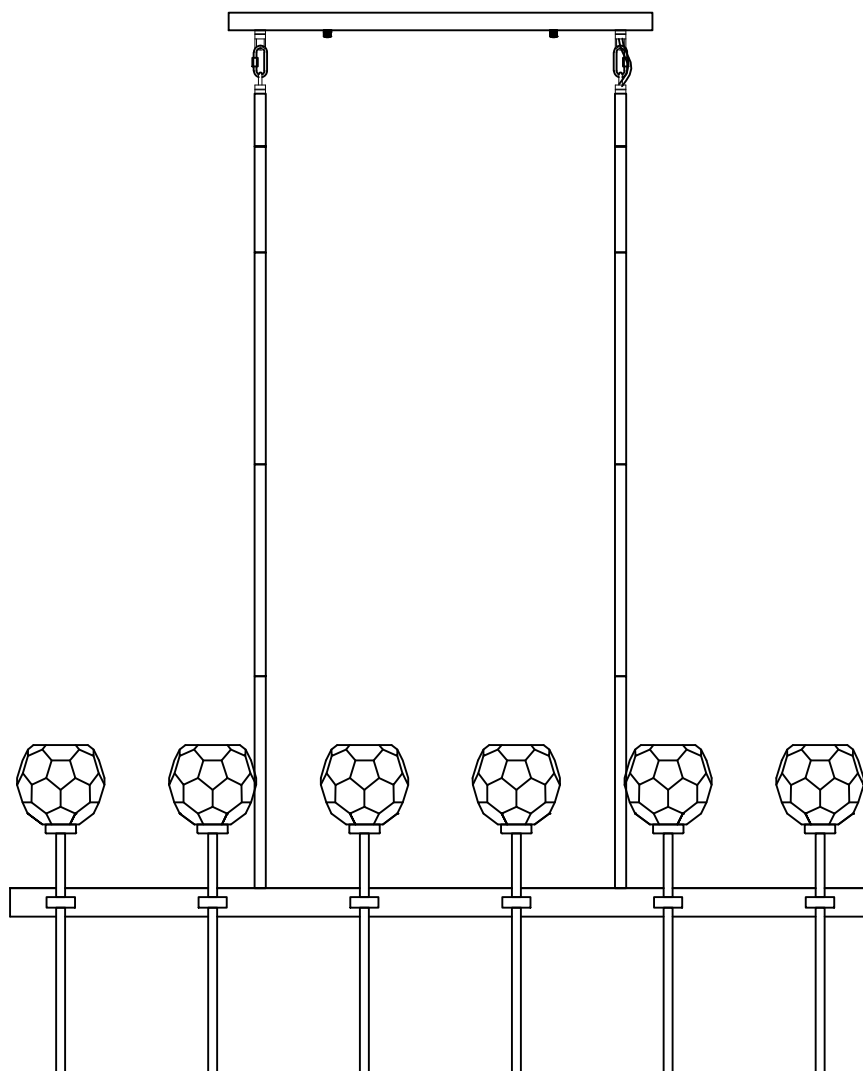

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP1:

Assemble the Rods(B、C、D) onto fixture body(A).
get the desired fixture height.

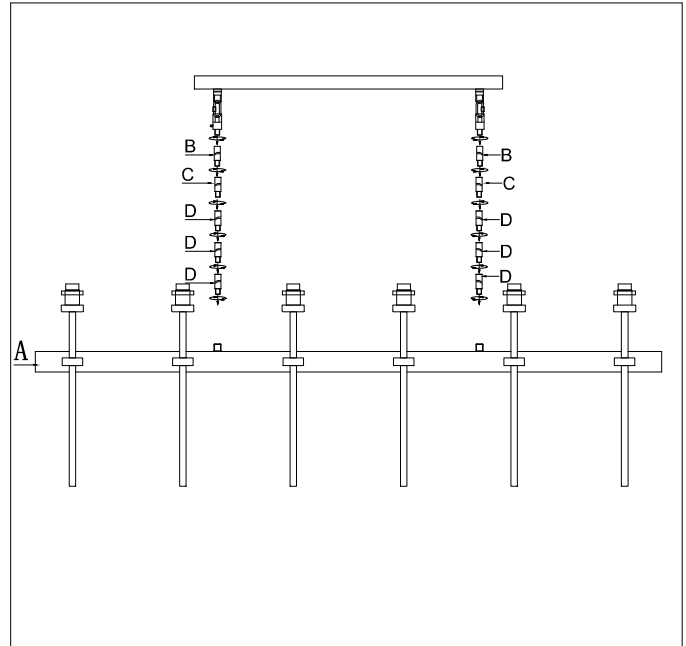


STEP 2:

Secure mounting plate(G) tight onto Ceiling by 2pcs metal anchors(F) and 2pcs nuts(H), and use the 2pcs screws(I) to secure the mounting plate(G) against onthe junction box (E not included).

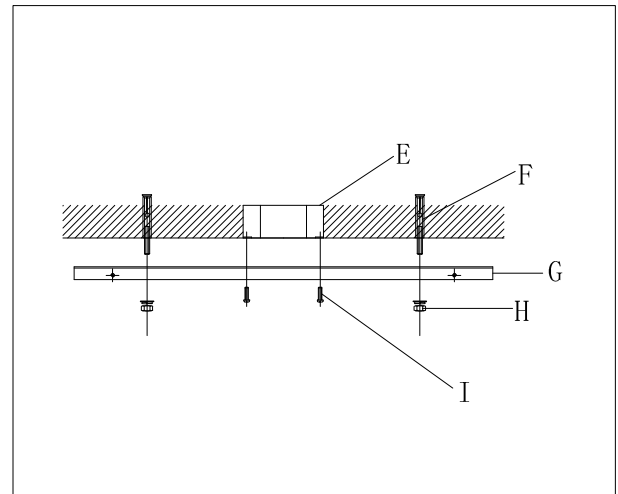

STEP 3.:



Use the movable buckle (K) hang top of two group rods onto the ring (J) of canopy . and tighten the nuts on the movable buckle (K).

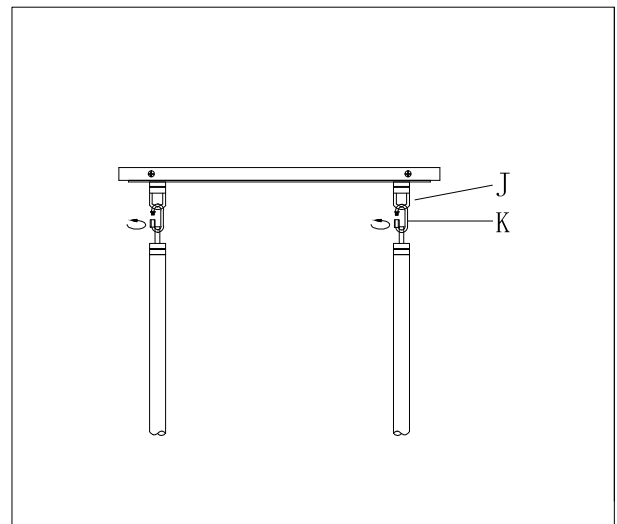

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP 4.:

Wrap the Ground wire from the fixture around the screw on the mounting plate.
Connect the white wire from the fixture to the white wire (Neutral wire) from Junction box with wire connector(N)
Connect the Black wire from the fixture to the black wire (Live wire) from junction box with wire connector(N)

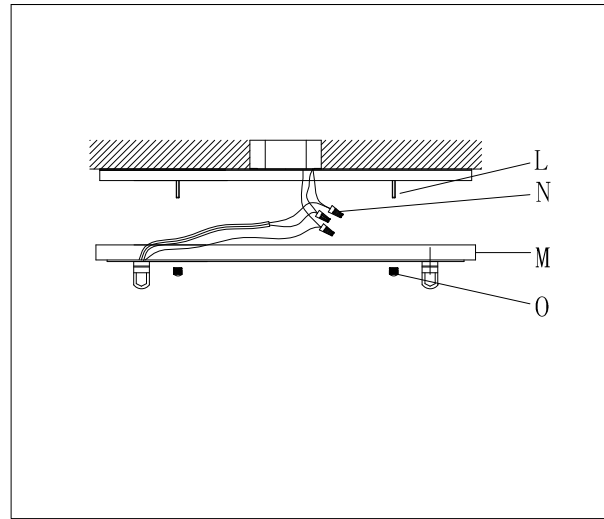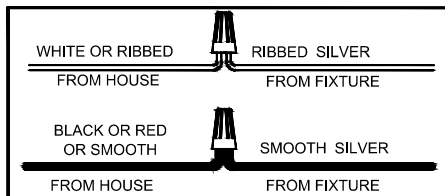

STEP 5.:

Align the Canopy (M) with the mounting plate (G), the mounting screws from mounting plate pass through the Canopy holes secured tight with 2 cap finials (O) on the mounting screws.

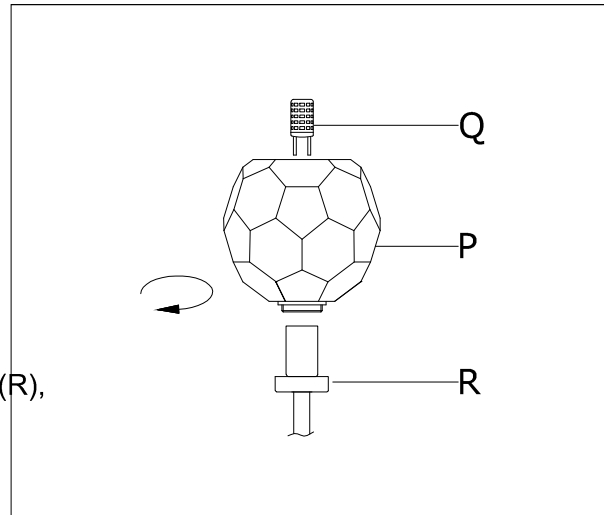

STEP 6.:

Assemble the crystal shade(P) onto the metal holder(R), insert 12pcs G9 bulbs(Q) into the socket.
When assemble or take off of the crystal, use your hand to hold the lamp body to prevent crystal falling.

STEP 6:

Connect breaker and turn on Light.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.



INSTALLATION INSTRUCTION

For Safety Cable Installation

In Instruction: This fixture is provided with a Safety Cable. The Safety Cable provides a back up system the fixtures frame and the installation hardware. It is essential that the Safety Cable be properly installed. The Cable must be secured to a STRUCTURAL MEMBER of the building, and not to the outlet box. The Cable must be terminated with SLEEVE specifically sized for the Cable per the following steps:

1. Insert enough cable through one side of the sleeve to form a large loop.
2. Wrap the Cable around the Structural Member or Top Chain Link,
3. turn back the cut end and inserting into opposite side of sleeve, Use two sleeves if desired
4. Pull back on cable until desired loop size is obtained. It is recommended to use thimble in loop
5. Allow 1/8" of cable cut end to extend beyond end of sleeve. Make sure this does not slip back into sleeve while swaging

Please refer to the below Fig. 1 Fig 2 for the detail information!

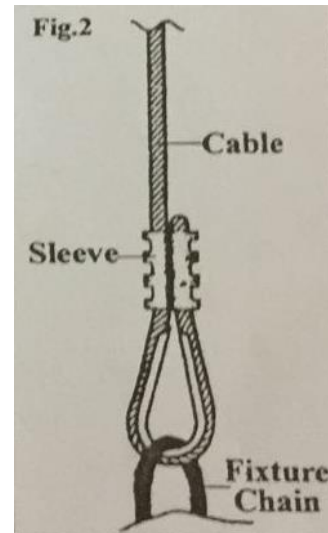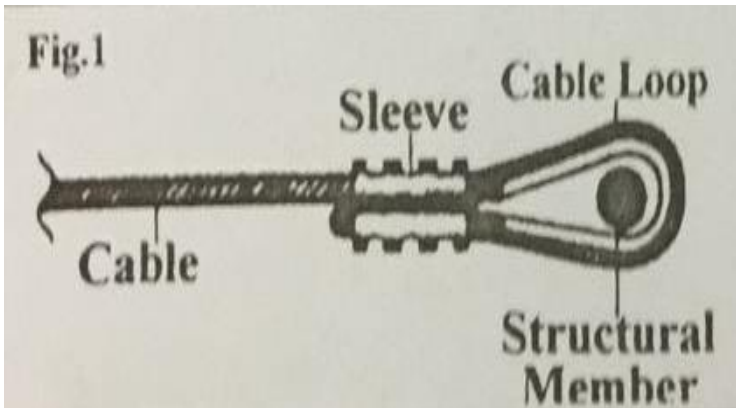


Safety Cable must be mounted on the chandelier TOP

This is a sketch for only Safety Cable mounting, to CHAIN. The Cable must be secured to a STRUCTURAL MEMBER of the building, and not to the outlet box.

Remark: Pls make sure all hardware is properly tightened and that the cable is positioned clear of any obstructions!

SAFETY CABLE ASSEMBLY

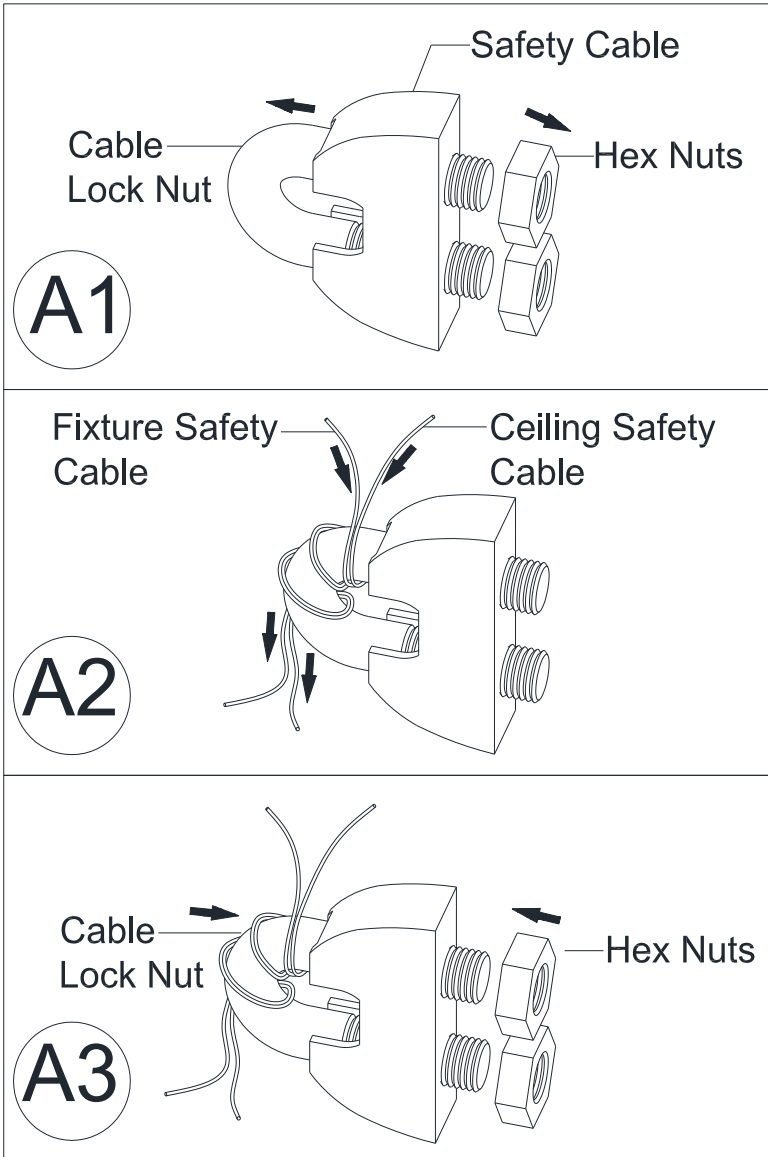

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.