




L I G H T I N G

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ITEM NO.: CD10334-10 / AGB


ITEM NO.: CD10335-10 / PN

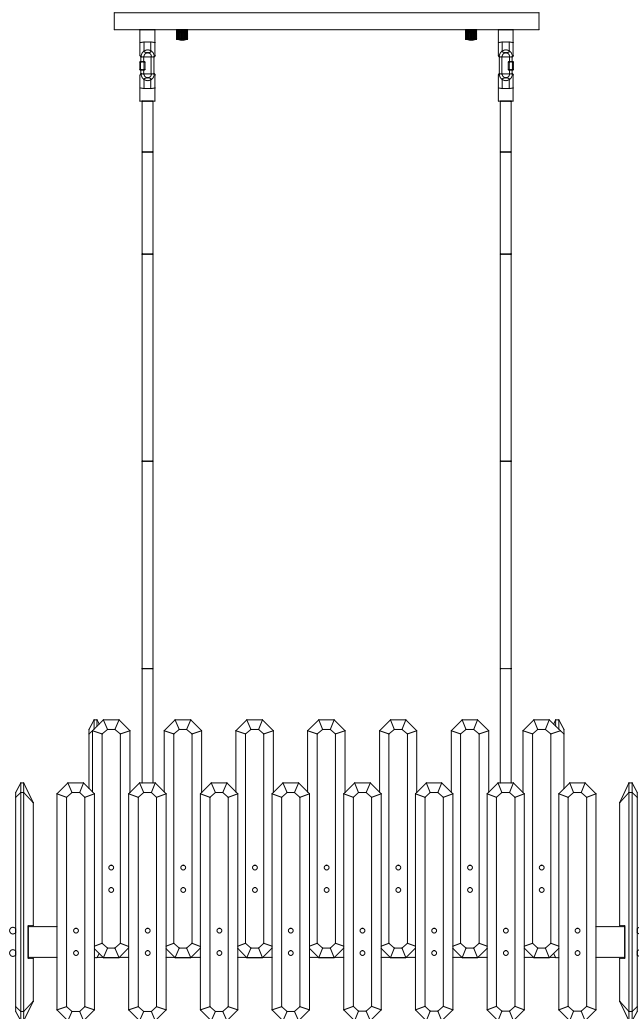

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP1:

Assemble the Rods(B、C、D) onto fixture body(A).
get the desired fixture height.

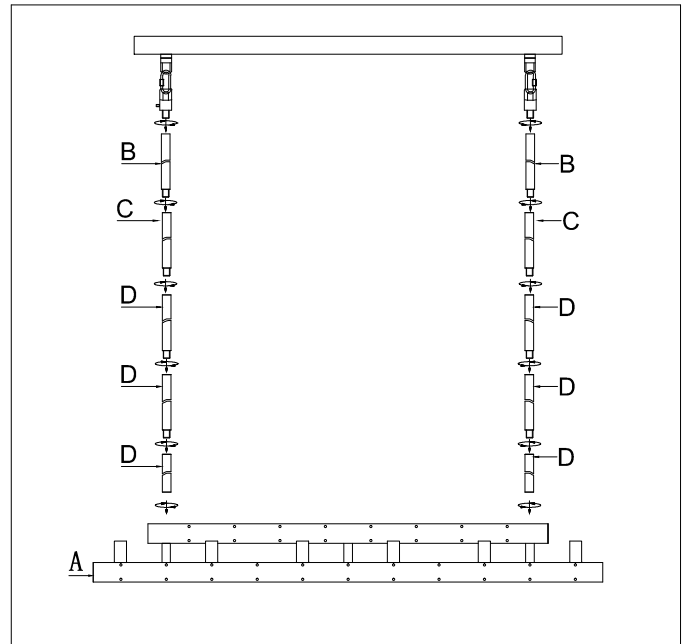


STEP 2:

Secure mounting plate (G) tight on the Ceiling by 4pcs metal anchors(F) and 4pcs nuts(H), then use 2pcs screws (I) to secure the mounting plate(G) onto junction box(E not include).

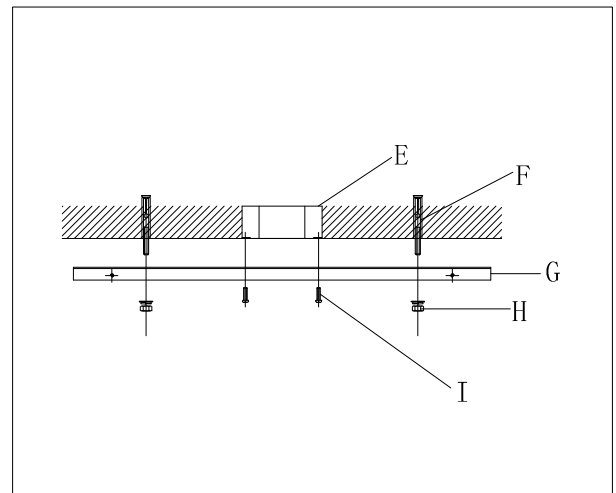

STEP 3.:



Use the movable buckle (K) hang top of two group rods onto the ring (J) of canopy . and tighten the nuts on the movable buckle (K).

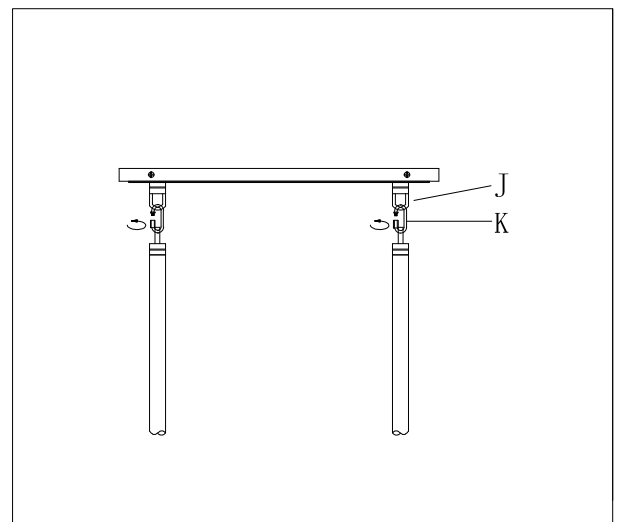

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

STEP 4.:

Wrap the Ground wire from the fixture around the screw on the mounting plate.
Connect the white wire from the fixture to the white wire (Neutral wire) from Junction box with wire connector(N)
Connect the Black wire from the fixture to the black wire (Live wire) from junction box with wire connector(N)

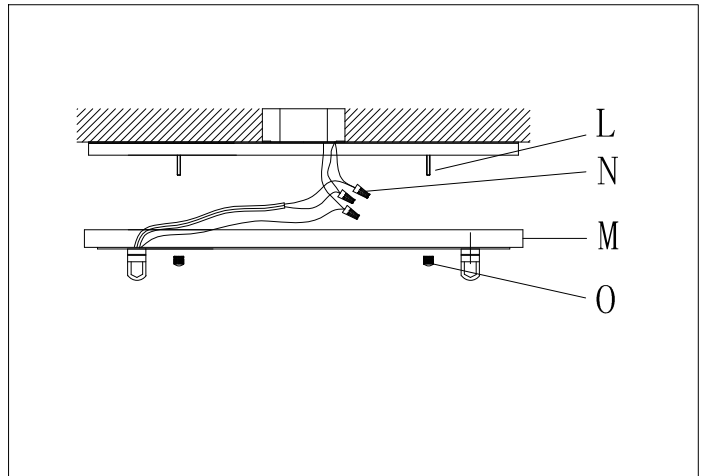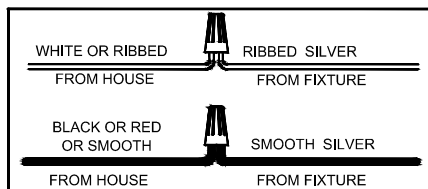

STEP 5.:

Align the Canopy (M) with the mounting plate (G), the mounting screws from mounting plate pass through the Canopy holes secured tight with 2 cap finials (O) on the mounting screws.

STEP 6.:

Assemble the crystals(P) onto the fixture body(A) by ball screw (R) together with metal tube (S) & clear washer (T), see right detail image. (Note: There are 6 places need add one small metal plate (U) to cover the screw)

STEP 7.:


Insert E12 bulbs(Q) onto the socket, when assemble or take off of the crystal, use your hand to hold the lamp body to prevent crystal falling.

STEP 8:


Connect breaker and turn on Light.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth.
Avoid the use of harsh or abrasive chemicals as they may damage the finish.

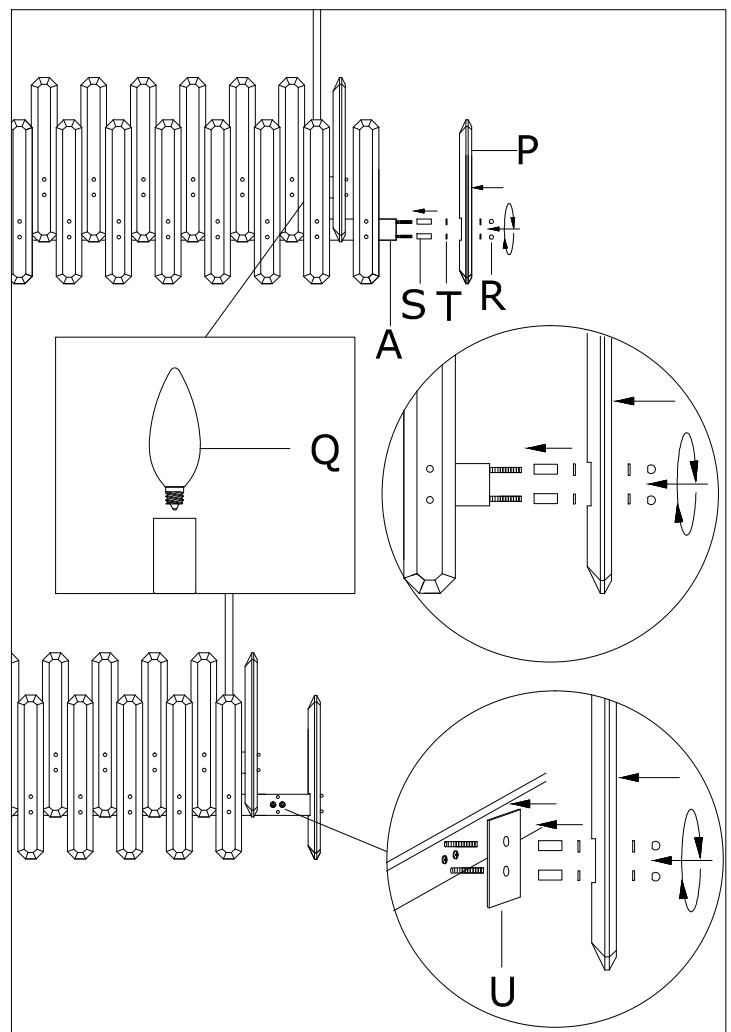

SAFETY CABLE ASSEMBLY

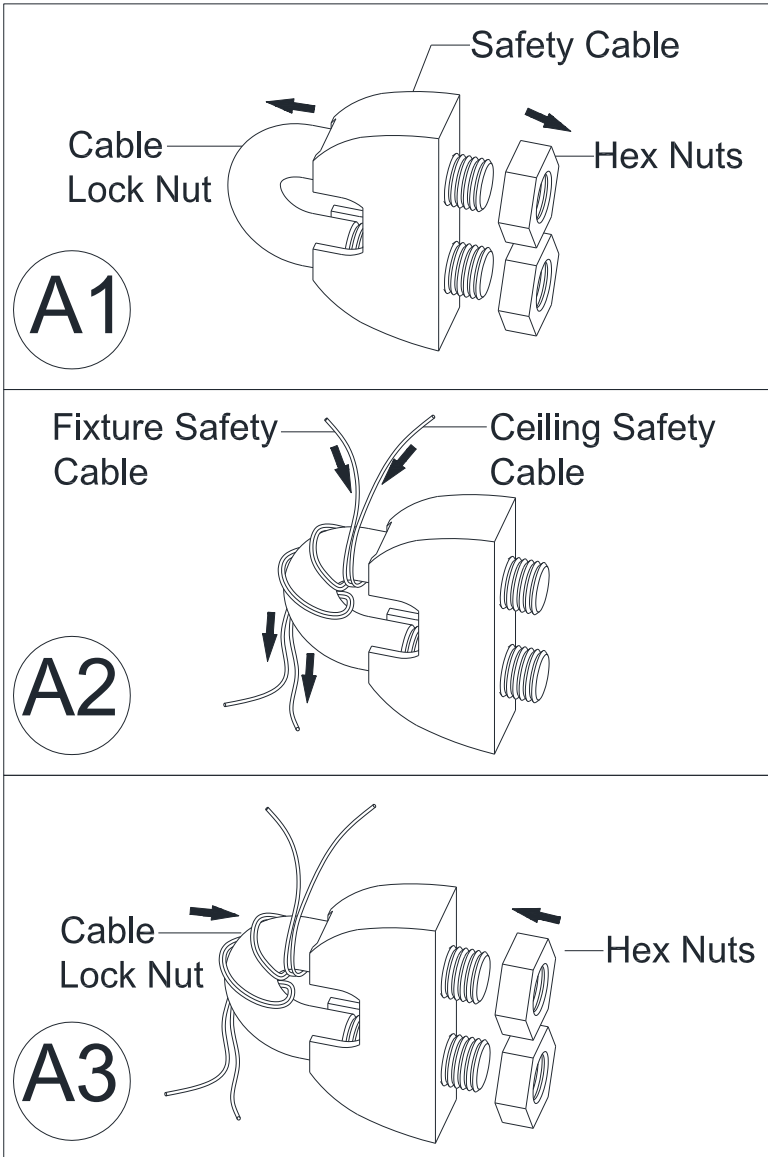

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.