




L I G H T I N G

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ITEM NO.: P30099/4/AGB
P30100/4/PN

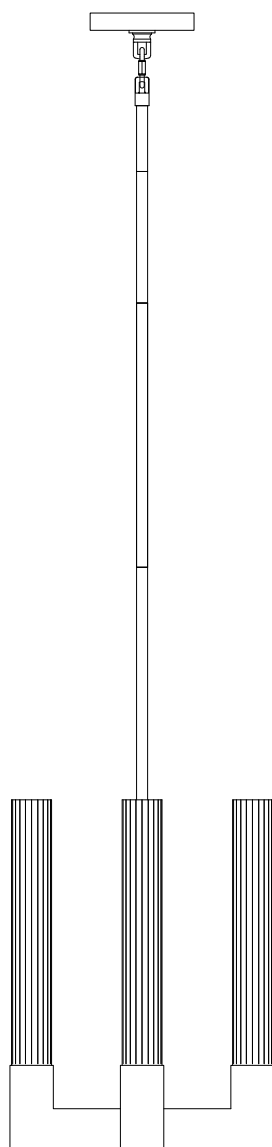


FOR YOUR SAFETY

WARNING:BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF:ETHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

CAUTION: THE PRODUCT SHOULD BE INSTALLED BY A QULIFID ELECTRICAN THAT IS AWARE OF THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


STEP 1:

Assemble the rods(B、C、 D) onto fixture body(A) and get the desired height.

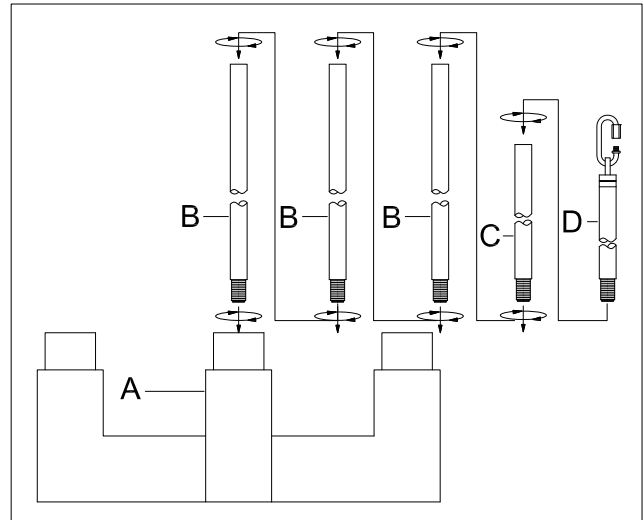


STEP 2:

Secure the mounting plate(F) tight onto the outlet box(E not included) with box screws(G).

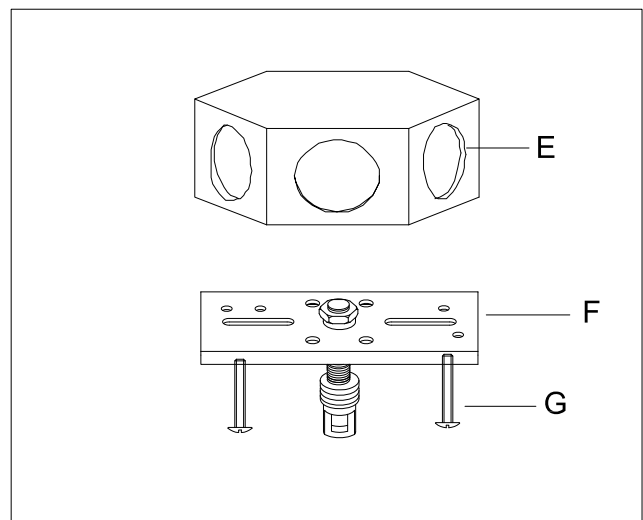



STEP 3:

Loosen the collar(K),allowing the rod(L) pass through the collar and canopy(J),connect the quick link(I) onto loop(H) and tighten with nut.

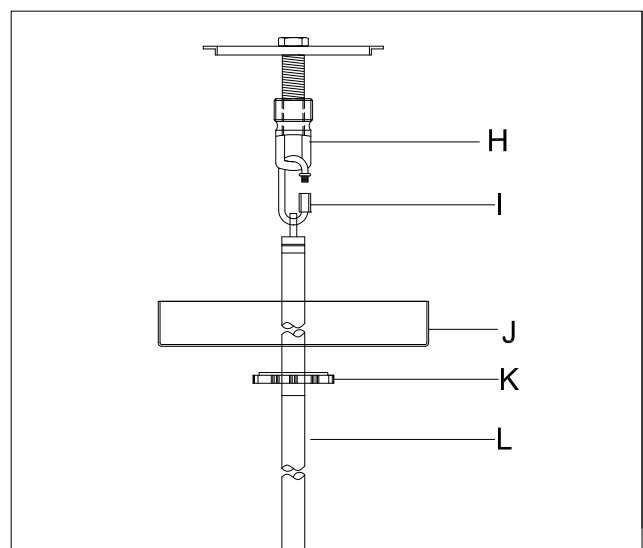

STEP 4:

Wrap the Ground Wire from the fixture around the ground screw on the mounting plate.
Connect the ribbed silver wire from the fixture to white wire(Neutral wire) from outlet box with wire connector.
Connect the smooth silver wire from the fixture to black wire(Live wire) from outlet box with wire connector.

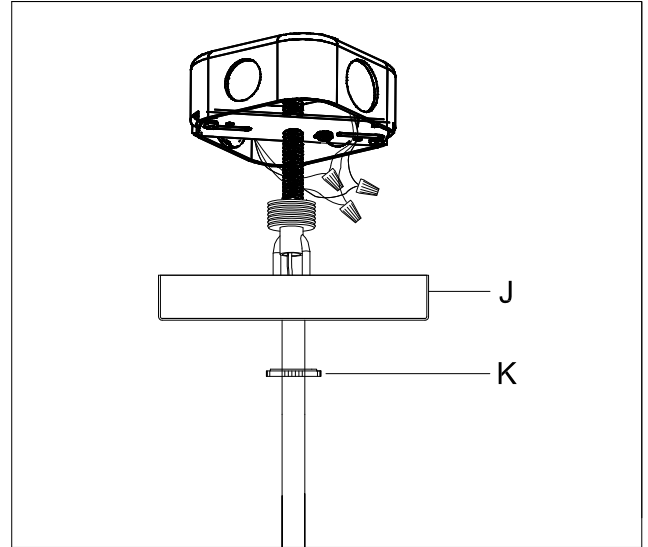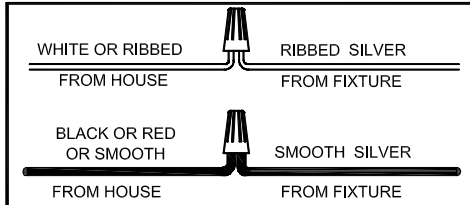


STEP 5:

Align the canopy(J) onto the ceiling and lock with collar(K).

STEP 6:

Assemble 4pcs E26 bulbs(N not included,MAX 40W) into sockets.Finally,insert the glass tubes(M) into the fixture body(A).

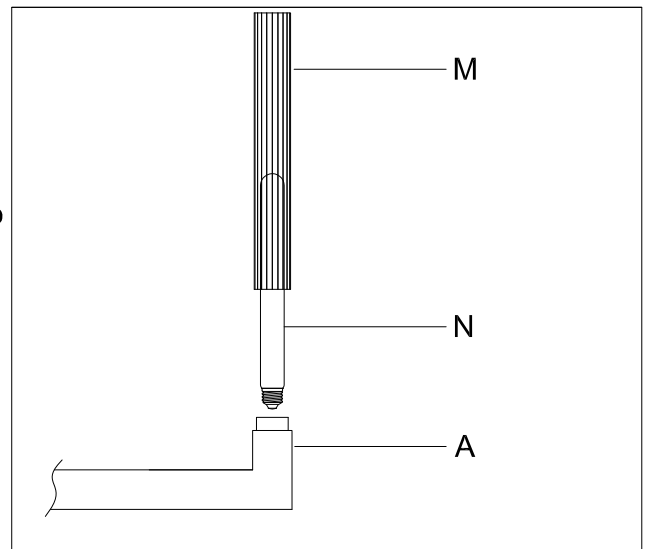

STEP 7:

Connect breaker and turn on Light.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.