




L I G H T I N G

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ITEM NO.: CD10326-15/AGB
CD10327-15/PN

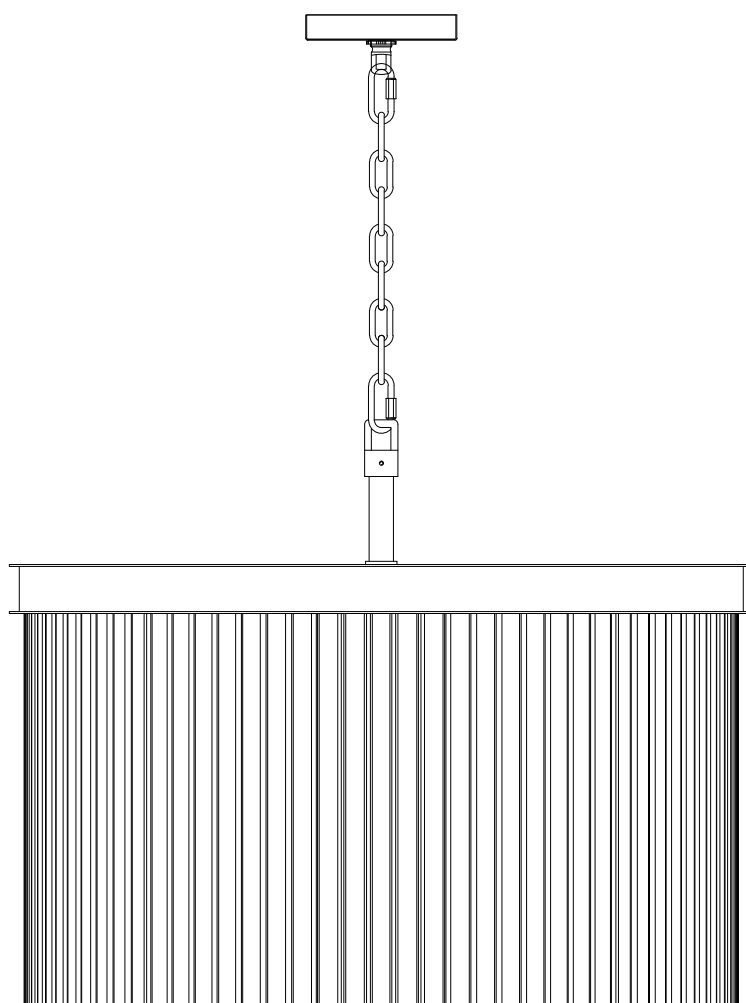


NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

STEP 1:

Take all the components out of cartons carefully.



Use the cable (A) pass through the chain, the collar (K) & canopy (J), connect the bottom move buckle of chain to the loop (C) of fixture body, and tighten the nuts on the movable buckle (B).

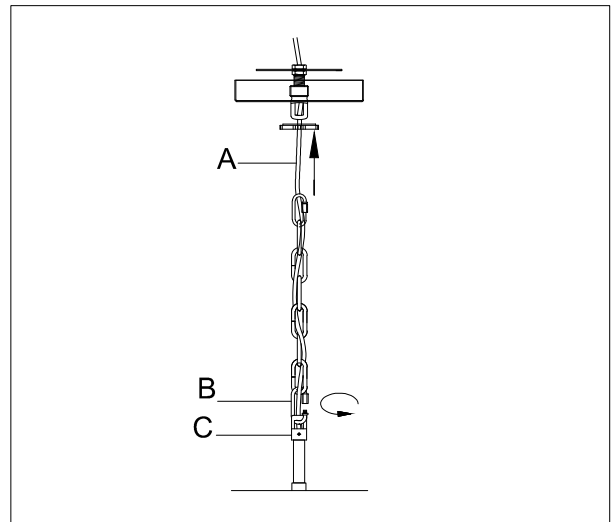

STEP 2:


Wrap the Ground wire from the fixture around the screw on the mounting plate.

Connect the white wire from the fixture to the white wire (Neutral wire) from Junction box with wire connector(E)
Connect the Black wire from the fixture to the black wire (Live wire) from junction box with wire connector(E)

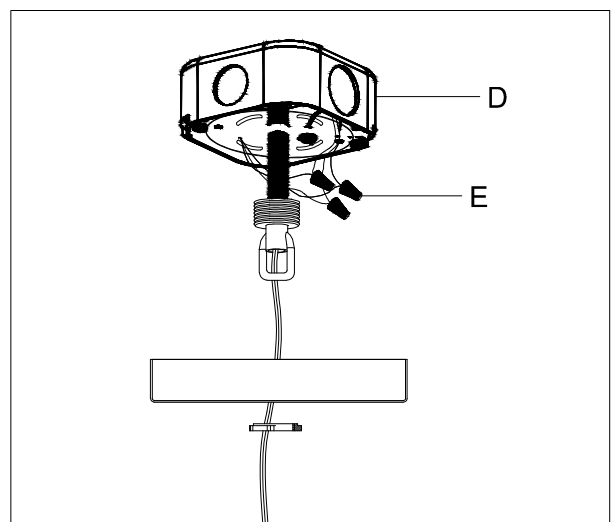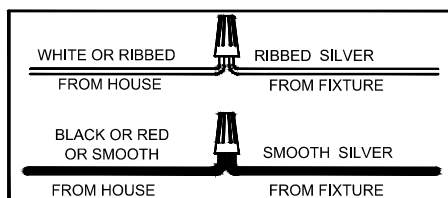

STEP 3:


Secure mounting plate(H) tight onto the junction box (D not included) by 2pcs screws(G), and use 8pcs metal anchors(F) and 8pcs nuts(I) to secure the mounting plate(J) tight against on ceiling.

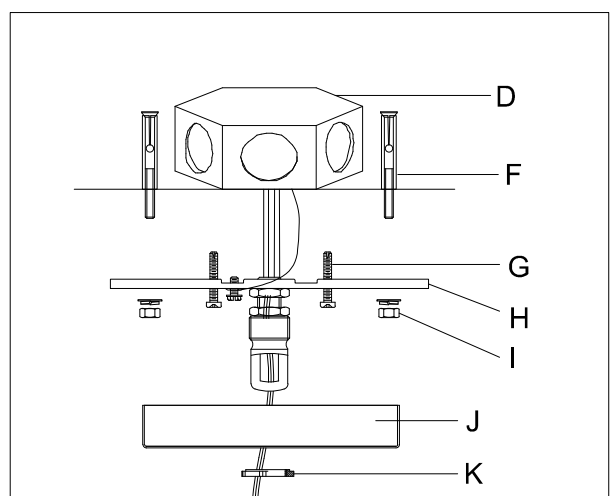

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP 4:

Push the canopy (J) onto ceiling and lock it tightly with the collar (K) , hang the chain onto the mounting plate Loop (L), and tighten the nuts on the movable buckle (M).

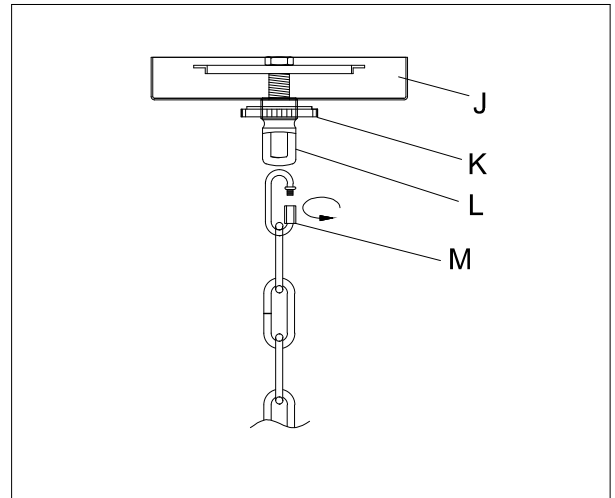


STEP 5:

Put on 20pcs E12 bulbs(N not include) into the socket.

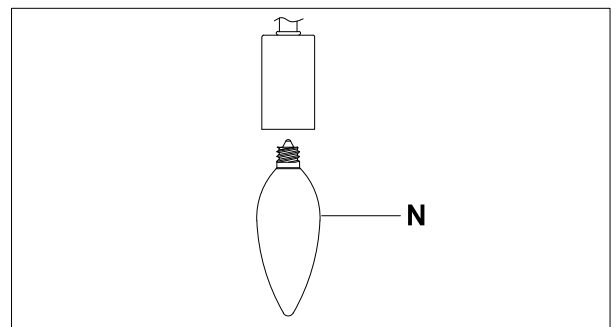

STEP 6:


Hang the Glass bars (by turns of: E → D →C →B→A) onto the fixture body(O), See right Detail: Glass placement.

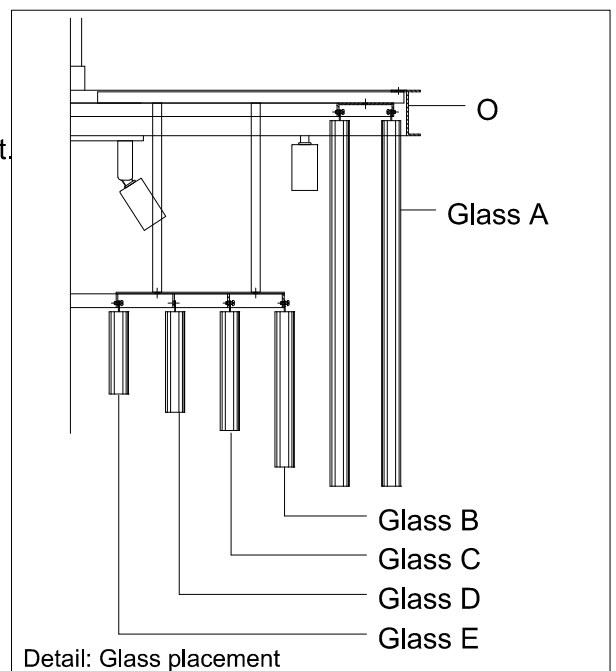

Cleaning & Care:

o clean, wipe the Fixture with a soft, dry
void the use of harsh or abrasive chemicals
as they may damage the finish.

SAFETY CABLE ASSEMBLY

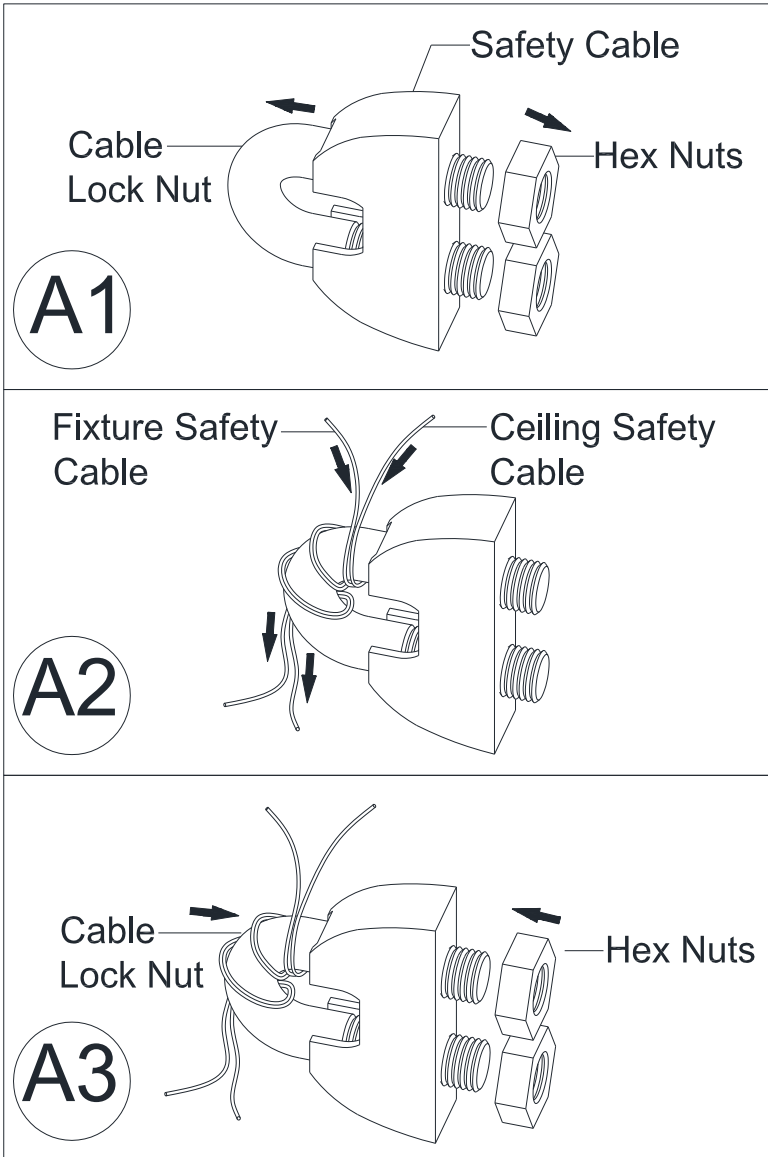

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.