

## CD10330/17/AGB

### Assembly and Installation Instructions

#### WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

**CAUTION:** HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall).

THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX.

TWO PERSON INSTALLATION

#### ASSEMBLY INSTRUCTIONS - CHANDELIER

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.
  - A. Wire Connectors (3)
  - B. Metal Concrete Anchors (8)
  - C. Wood Screws (8)
  - D. Mounting Plate (1)
  - E. Canopy Cover (1)
  - F. Canopy Screws (2)
  - G. Mounting Screws (2)
  - H. Decorative Canopy Nuts (4)
  - I. Chain Link Connectors (4)
  - J. Decorative Chain (2)
  - K. Fixture Body (1)


2. Pre-plan, make sure all Warnings and Cautions above have been completed.
  - If concrete ceiling make sure (B) metal anchors are secure in place.
  - Decide on the hanging height of fixture top to bottom, prepare (J) decorative chains to lengths by removing links not required.
  - Connect (K) fixture body to (E) canopy cover.
    - Connect (I) chain links to top of (K) fixture body and (E) canopy cover.
    - Loosely weave power wire and safety cable through 1 (J) chain into (E) canopy cover so wires are inside (E) canopy cover
    - Connect (J) decorative chains to (I) chain links which are already connect to (E) and (K). Once completed finger tighten all (I) chain links till fully closed.

3. Install (D) mounting plate to junction box with (G) mounting screws. Once secure to junction box if you used (B) metal anchors secure with metal nuts tightening full plate onto ceiling. If (C) wood screws fully read the Cautions above.


4. You are now ready to install the fixture to the ceiling. You will require minimum two people to complete the install.
  - First connect the safety cable to a secure strong supporting area. See Illustration below on Page XX.
  - Connect all the wires and ground using (A) wire connectors by twisting matching wires as below.
    - Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
    - Live Wire (L, Black) Black to Black Wire from junction box.
    - Neutral Wire (N, White) White to White Wire from junction box.
    - Once all connected, proceed to next step.

5. Raise the (E) canopy cover to the affixed mounting plate (D) until screw are through canopy and is flush to ceiling. Secure with (H) decorative nuts.

6. You are now complete and can install light bulbs and glass/metal stems (Installation Map on Page 3)


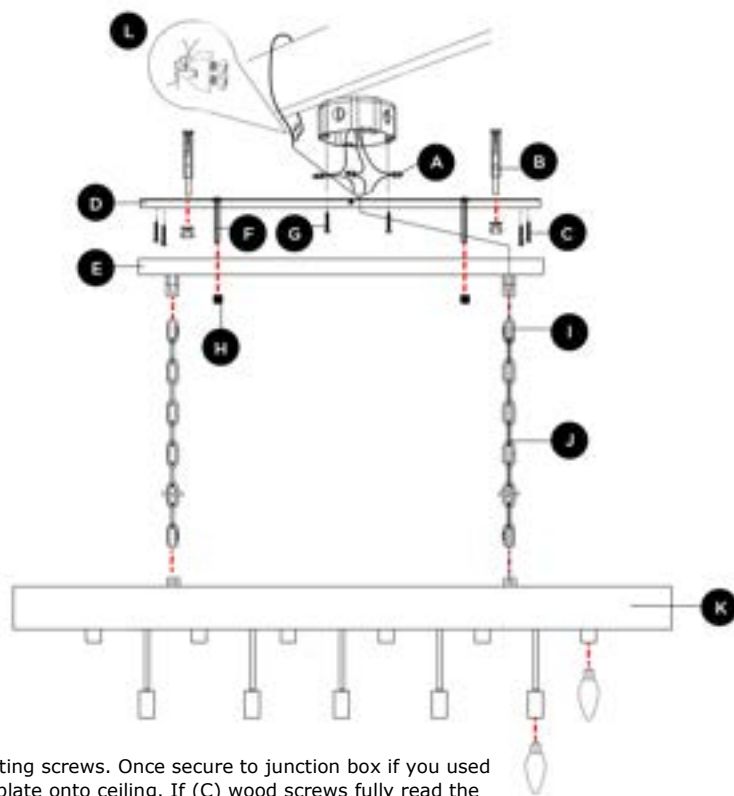


## ASSEMBLY INSTRUCTIONS – FLUSH MOUNT

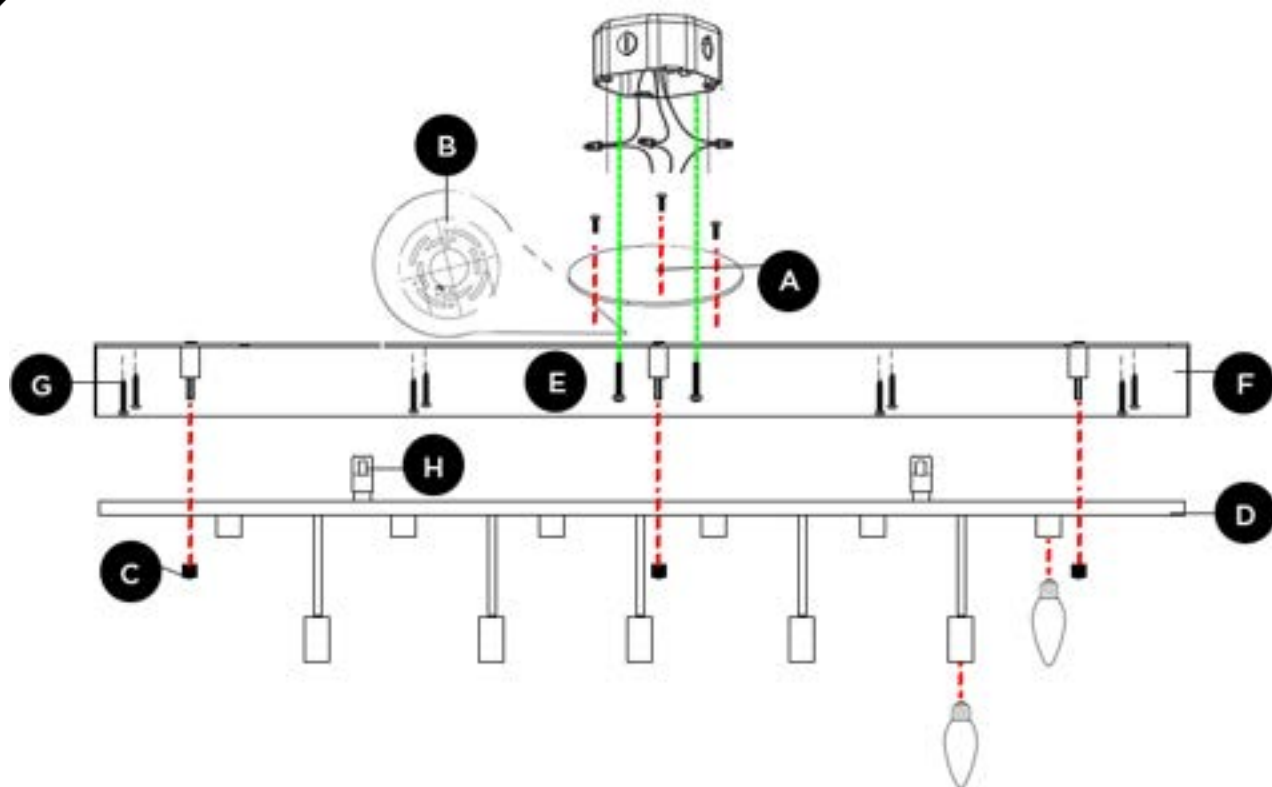

- Remove fixture from its original packaging, verify all components and complete a visual inspection.
  - Metal Plate Cover (1) Screws (3)
  - Exposed when plate removed
  - Inner Decorative Nuts (6)
  - Lamp Base (1)
  - Mounting Screws (2)
  - Fixture Frame Cover (1)
  - Wood Screws (8)
  - Chain Connectors (2)
- Pre-plan, make sure all Warnings and Cautions above have been completed.
  - Remove (A) top middle plate, unscrew and remove plate to expose (B)
  - Remove (C) 6 inner decorative nuts to separate (F) fixture frame cover from (D) lamp base.
  - On (D) lamp base, remove (H) chain connectors.
  - Install (F) fixture frame cover to the junction box using (E) mounting screws. Once secure to junction box if on a concrete ceiling make sure prior to installing to install metal concrete anchors and secure with anchor nuts. If securing with wood screws fully read the cautions on top of Page 1.
- Connect all the wires and ground using wire connectors by twisting and matching wires as below.
  - Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
  - Live Wire (L, Black) Black to Black Wire from junction box.
  - Neutral Wire (N, White) White to White Wire from junction box.
  - Once all connected, proceed to next step.
- Once fully wired, line up and insert (D) lamp base into (F) fixture frame and reinstall using (C) inner decorative nuts to secure.
- You are now complete and can install light bulbs and glass/metal stems (Installation Map on Page 3)


## SHADE ASSEMBLY

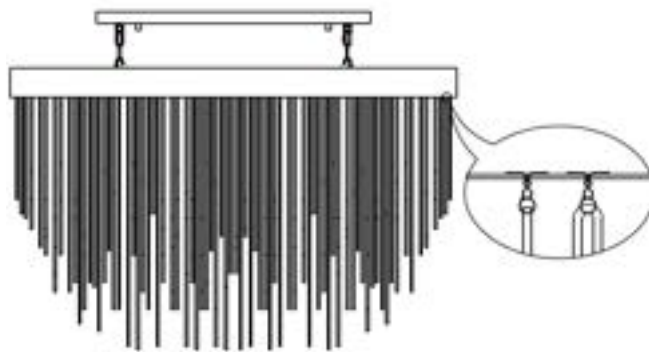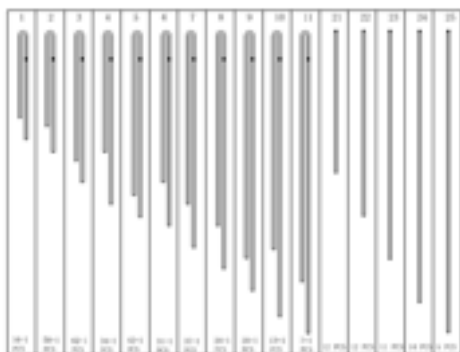

For each decorative glass or metal stem, loop them through the provided metal clip rings and hook into its location shown on the map below.

3	2	3	1	21	3	2	3	1	3	2	21	3	2	3	1	3	2	21	3	2	3	1	3	2	21	3	2	3	1	3	2	21	2	3	1	3					
1	4	22	2	3	5	3	4	2	22	2	3	5	3	4	2	22	2	3	5	3	4	2	22	2	3	5	3	4	2	22	2	3	5	3	4	2					
2	2	5	23	4	7	5	6	4	5	23	4	7	5	6	4	5	23	4	7	5	6	4	5	23	4	7	5	6	4	5	23	6	4	5	2	3					
21	3	4	6	7	8	6	5	7	24	6	7	8	6	5	7	24	6	7	8	6	5	7	24	6	7	8	6	5	7	24	5	7	6	4	22	1					
3	2	6	24	☐	9	7	24	9	8	☐	10	8	9	7	☐	9	8	10	8	9	☐	8	10	8	9	☐	24	9	7	8	9	☐	7	5	3	3					
2	5	7	8	10	11	25	☐	9	11	10	25	11	☐	9	11	10	25	☐	9	11	10	25	☐	9	11	10	25	☐	9	11	10	11	10	☐	25	9	10	8	7	5	2
3	3	5	6	☐	7	9	8	10	24	☐	7	9	8	9	☐	8	10	8	9	7	☐	9	8	24	10	☐	8	9	7	9	8	☐	6	23	2	3					
1	22	4	7	6	24	6	7	8	6	5	7	24	6	7	8	6	5	7	24	6	7	8	6	5	7	24	6	7	8	6	5	7	24	5	3	21					
3	2	23	4	7	5	6	4	23	4	7	5	6	4	5	23	4	7	5	6	4	5	23	4	7	5	6	4	5	23	4	7	5	6	4	2	2					
2	4	2	3	5	3	22	2	3	5	3	4	2	22	2	3	5	3	4	2	22	2	3	5	3	4	2	22	2	3	5	3	4	2	22	4	1					
3	2	3	1	21	3	2	3	1	3	2	21	3	2	3	1	3	2	21	3	2	3	1	3	2	21	3	2	3	1	3	2	21	2	3	1	3					

## SAFETY CABLE ASSEMBLY

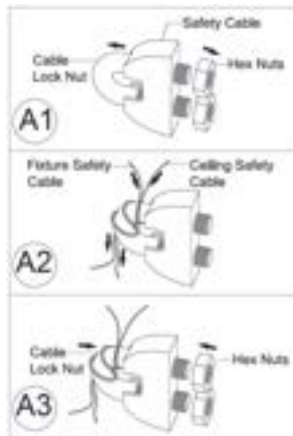

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.
2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.
3. Secure by tightening both Hex Nuts until tight.