


# ASSEMBLY AND INSTALLATION INSTRUCTIONS


ITEM NO:CD10074/6/PN

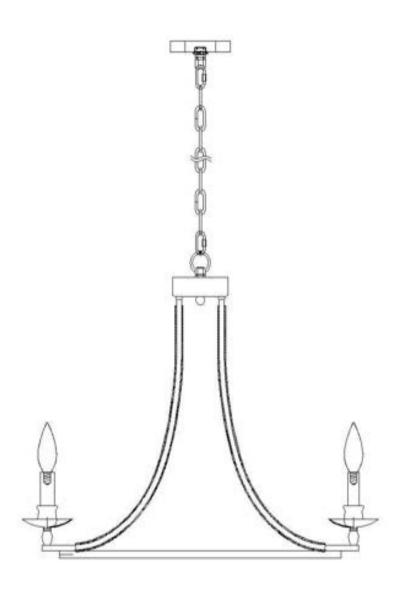

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


#### STEP 1:

Attach the Nipple(C)to the Mounting Bar(B) by screwing in the Nipple and locking it on the opposite side with the Nut(A).




#### STEP 2:

Secure the Mounting Bar(G)to the Outlet Box(D)with the Mounting Screws(F). Tighten until snug.



#### STEP 3:


Attach the Canopy Loop(I)and Nut(H) into place on the Mounting Bar(G).



MOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


#### STEP 4:

Connect the chain and the fixture use the Loop (J).



#### STEP 5:

Put the chain through the Canopy(N)and Collar (O). Connect Canopy Loop(L)and chain with the chain link(M). Fixed the Canopy(N)into the ceiling.





#### STEP 6:

may be ribbed.

wrap the Ground Wire from the Fixture around the Ground Screw on the Mounting Bar (H) and then connect the Ribbed Silver Wire from the Fixture to the White Wire (neutral wire) from the Outlet Box. Connect the Smooth Silver Wire from the Fixture to the Black Wire (live wire) from the Outlet Box. Cover the connections using the Wire Connectors (O).

NOTE: Black Wire inside Outlet Box may be red or smooth. White Wire inside Outlet Box






Page 3 of 4

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


### STEP 7:

Put the sleeve(U)in the lamp holder (V).

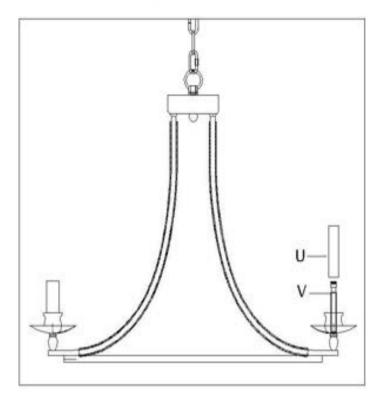

## STEP 8:

Screw the bulbs.

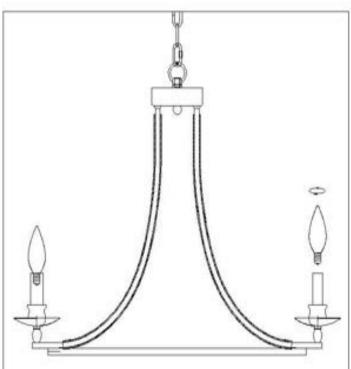

# Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.