




L I G H T I N G

ASSEMBLY AND INSTALLATION INSTRUCTIONS


ITEM NO.: CD10239/12/AGB
CD10240/12/PN

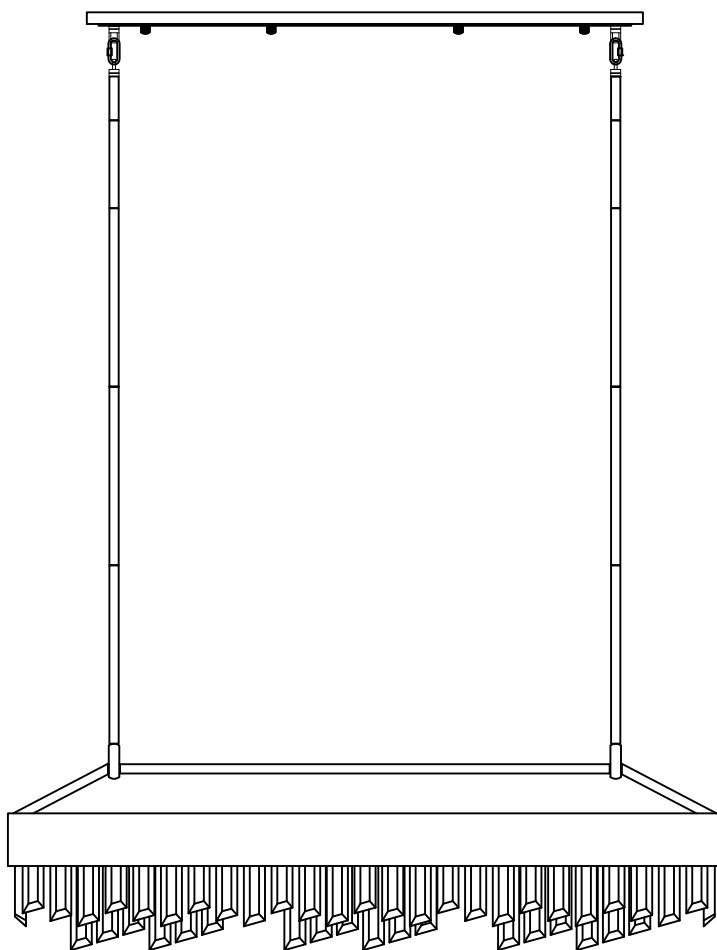

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP 1:

Attach the Rod(B) assembly to fixture(A). In turn attach other Rod(C) and Rod(D).

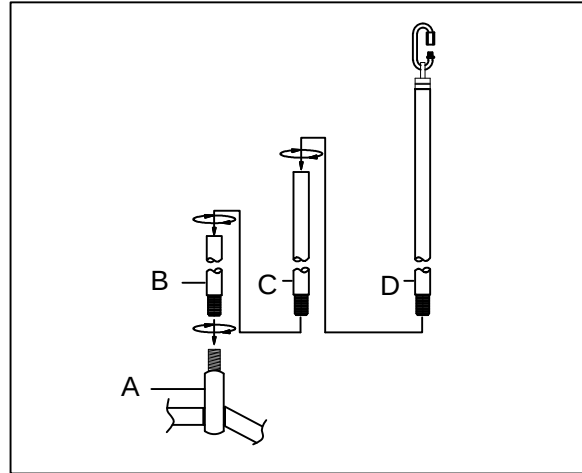


STEP 2:

Anchor (F) on the ceiling according to the hole on the hanging plate (G). And using screws (I) and bolt (H) to secure the hanging plate (G) with nuts on the ceiling.

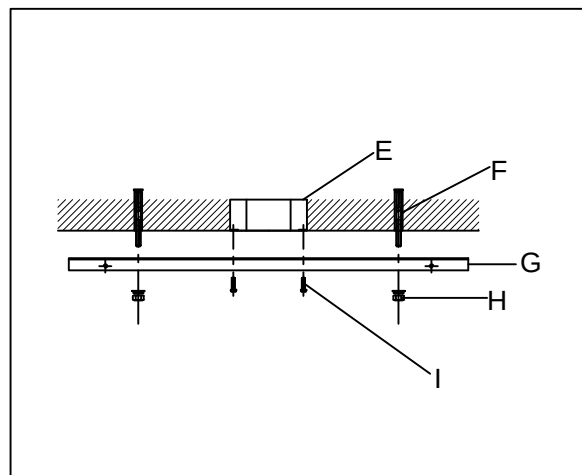

STEP3:

Use the movable buckle (K) on the top of stem to hang on the ring (J) of canopy . and tighten the nuts on the movable buckle (K).

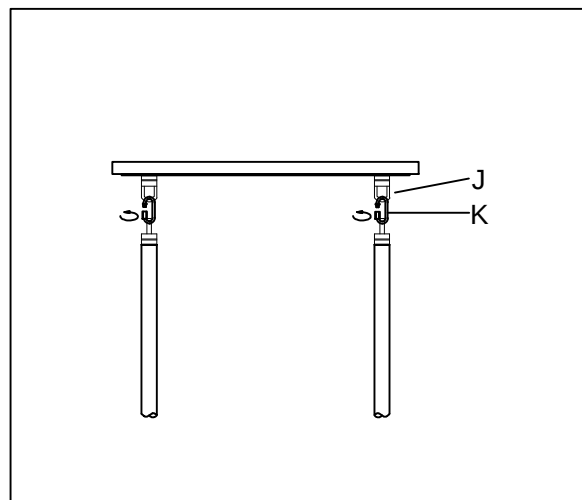


NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP 4:

Wrap the Ground Wire from the Fixture around the Ground Screw on the Mounting Bar and then connect the Ribbed Silver Wire from the Fixture to the White Wire (neutral wire) from the Outlet Box. Connect the Smooth Silver Wire from the Fixture to the Black Wire (live wire) from the Outlet Box. Cover the connections using the Wire Connectors.

NOTE: Black Wire inside Outlet Box may be red or smooth. White Wire inside Outlet Box may be ribbed.

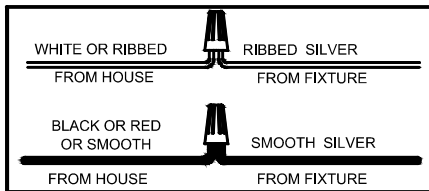



Assemble the canopy (M) onto the mounting plate (L) and secured by Ball nut (O)

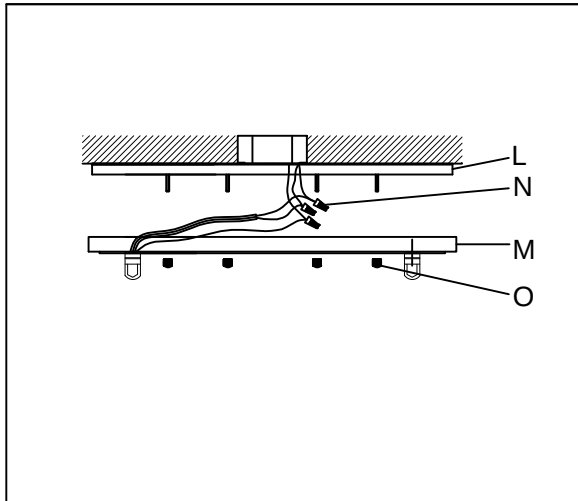

STEP5:

Use the hook(Q) to connect the crystal (R) and the lamp body (P). Put the bulbs (S) on the sockets

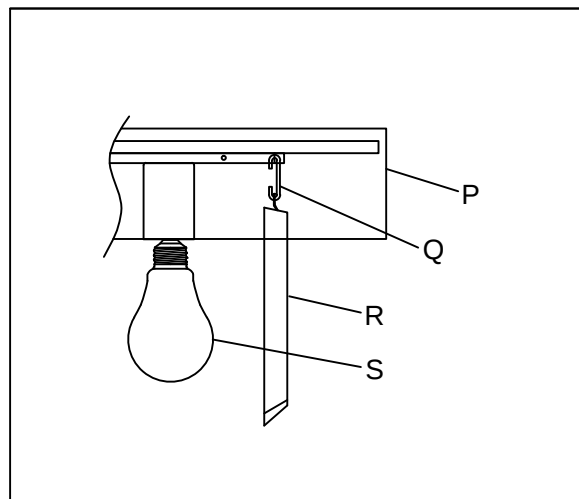

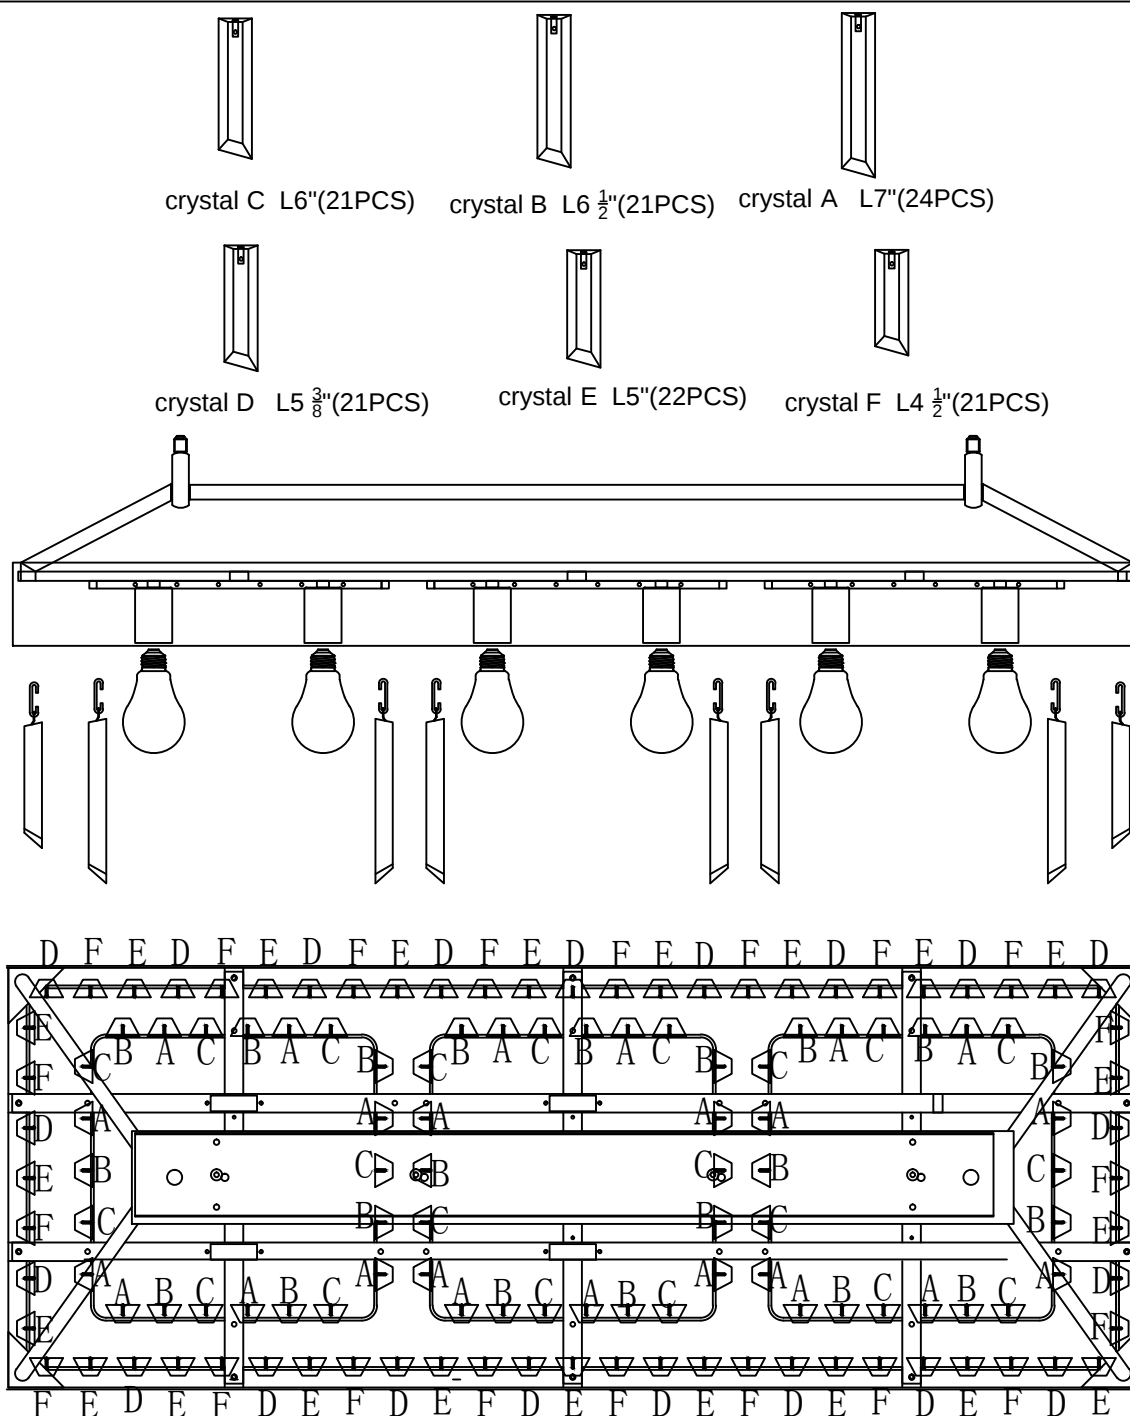


STEP6:

- 1.Reference diagram of Crystal hanging, crystal A,B and C is hung into the small box inside the lamp body.
- 2.Reference diagram of Crystal hanging, crystal D,E and F is hung into the big frame outside the lamp body.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.

SAFETY CABLE ASSEMBLY

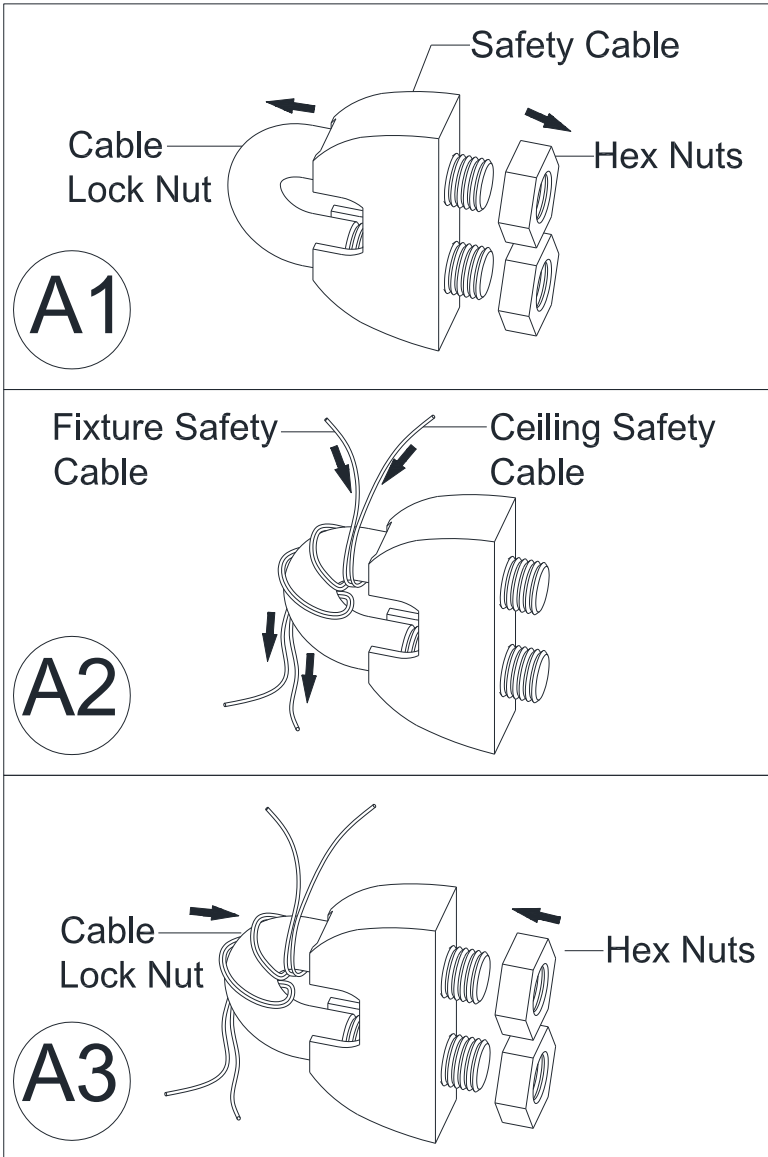

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.