

CD10421/12/AGB,CD10422/12/PN,CD10423/12/SBB Assembly and Installation Instructions

WARNINGS AND CAUTIONS FOR ALL BELOW


1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall). THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX. TWO PERSON INSTALLATION

ASSEMBLY INSTRUCTIONS - PENDANT

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.

- A. Metal Concrete Anchors (4)
- B. Mounting Plate (1)
- C. Wire Connectors (3)
- D. Canopy Cover (1)
- E. Chain Link Connectors (2)
- F. Thread Ring (1)
- G. Decorative Chain (1)
- H. Wire (1)
- I. Fixture Body (1)
- J. Mounting Screw (2)
- K. Steel cable nut (1)

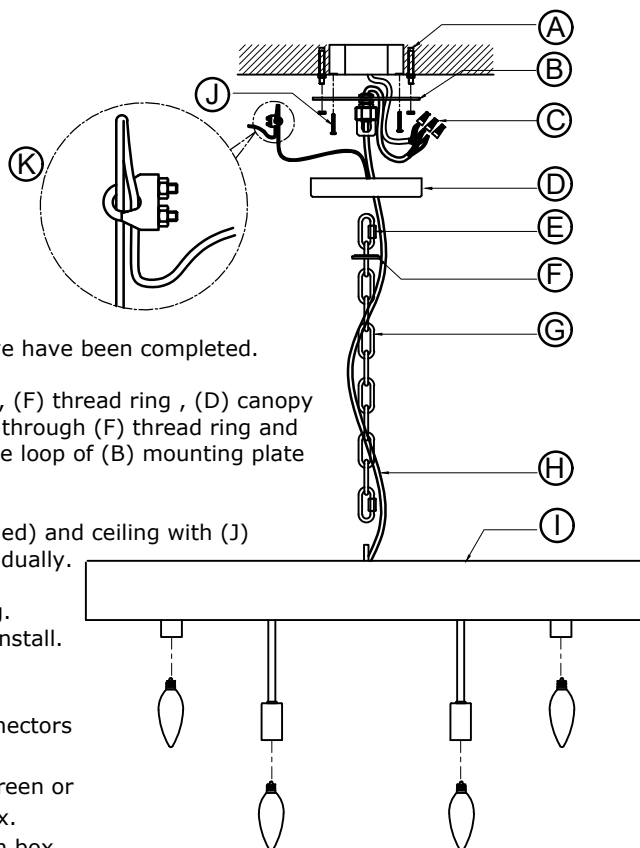

2. Pre-plan, make sure all Warnings and Cautions above have been completed.

3. Have the (H) wire run through (G) decorative chain , (F) thread ring , (D) canopy cover and (B) mounting plate, let (G) decorative chain through (F) thread ring and (D) canopy cover, attach (E) chain link connectors to the loop of (B) mounting plate and another is attached the loop of (I) fixture body.

4. Attach (B) mounting plate to junction box(not included) and ceiling with (J) mounting screws and (A) metal concrete anchors individually.

5. You are now ready to install the fixture to the ceiling. You will require minimum two people to complete the install.

- First connect the safety cable to a secure strong supporting area. See Illustration below on Page 1.
 - Connect all the wires and ground using (C) wire connectors by twisting matching wires as below
 - Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
 - Live Wire (L, Black) Black to Black Wire from junction box.
 - Neutral Wire (N, White) White to White Wire from junction box.
- Once all connected, proceed to next step.

6. Fixing (D) canopy cover to mounting plate with (F) thread ring.

7. You are now complete and can install light bulbs and glass/metal bars (Installation Map on Page 4)

CD10421/12/AGB, CD10422/12/PN, CD10423/12/SBB Assembly and Installation Instructions

WARNINGS AND CAUTIONS FOR ALL BELOW


1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall). THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX. TWO PERSON INSTALLATION

ASSEMBLY INSTRUCTIONS -PENDANT

If switching to rod suspension, the installation steps are as follows:

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.
 - A. Metal Concrete Anchors (4)
 - B. Mounting Plate (1)
 - C. Wire Connectors (3)
 - D. Canopy Cover (1)
 - E. Chain Link Connectors (2)
 - F. Thread Ring (1)
 - G. 3" Rod (1)
 - H. 6" Rod (1)
 - I. 12" Rod (3)
 - J. Fixture Body (1)
 - K. Mounting Screw (2)
 - L. Steel cable nut (1)
2. Pre-plan, make sure all Warnings and Cautions above have been completed.
3. Connect the (G) 3" rod, (H) 6" rod and (I) 12" rod in sequence, have the wire run through the connected rod, (F) thread ring, (D) canopy cover and (B) mounting plate, attach the (E) chain link connectors to the loop of (B) mounting plate and another is attached the loop of (J) fixture body.
4. Attach (B) mounting plate to junction box and ceiling with (K) mounting screws and (A) metal concrete anchors individually.
5. You are now ready to install the fixture to the ceiling. You will require minimum two people to complete the install.
 - First connect the safety cable to a secure strong supporting area. See Illustration below on Page 2.
 - Connect all the wires and ground using (C) wire connectors by twisting matching wires as below
 - Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
 - Live Wire (L, Black) Black to Black Wire from junction box.
 - Neutral Wire (N, White) White to White Wire from junction box.
- Once all connected, proceed to next step.
6. Fixing (D) canopy cover to mounting plate with (F) thread ring.
7. You are now complete and can install light bulbs and glass/metal bars (Installation Map on Page 4)

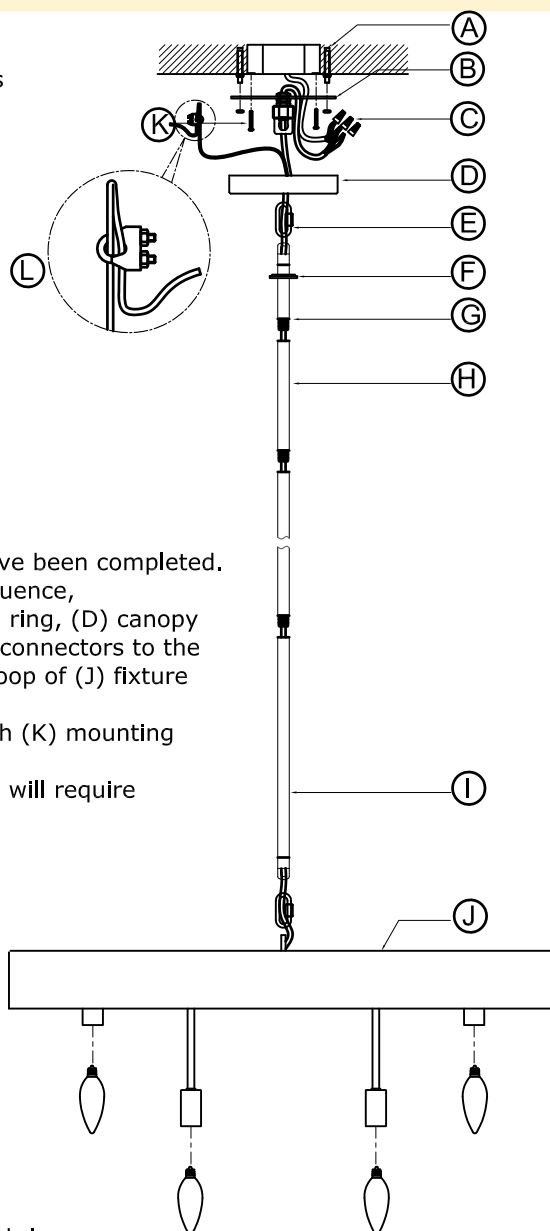

CD10421/12/AGB, CD10422/12/PN, CD10423/12/SBB Assembly and Installation Instructions

WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.


CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall). THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX. TWO PERSON INSTALLATION

ASSEMBLY INSTRUCTIONS - FLUSH MOUNT



If switching to ceiling mount, the installation steps are as follows:

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.

- A. Metal Concrete Anchors (4)
- B. Metal Disc (1)
- C. Canopy Cover (1)
- D. Fixture Body (1)
- E. Decorative Nuts (4)
- F. Mounting Screws (2)
- G. Wire Connector (3)
- H. Steel cable nut (1)

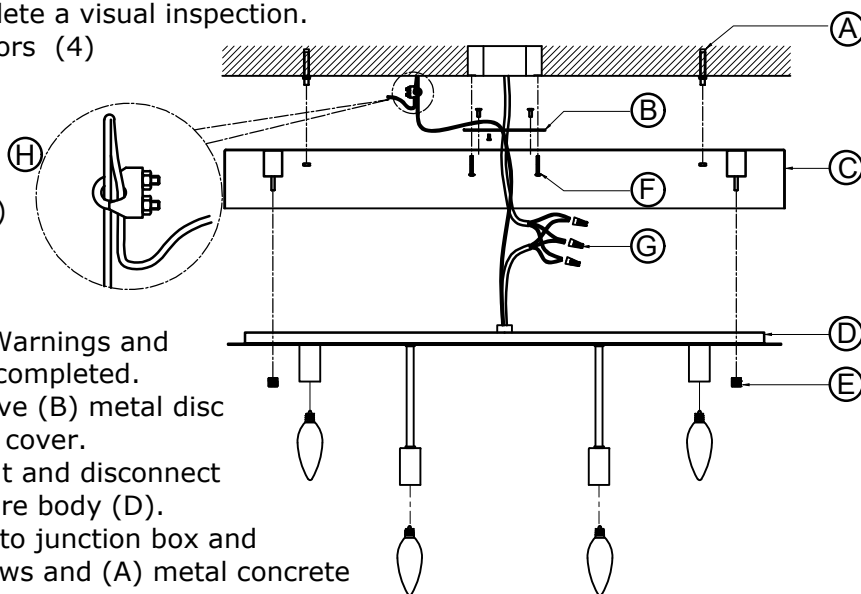

2. Pre-plan, make sure all Warnings and Cautions above have been completed.
3. Loosen screws and remove (B) metal disc in the middle of (C) canopy cover.
4. Loosen (E) decorative nut and disconnect (C) canopy cover and fixture body (D).
5. Attach (C) canopy cover to junction box and ceiling with (F) canopy screws and (A) metal concrete anchors individually.
6. You are now ready to install the fixture to the ceiling.
 - First connect the safety cable to a secure strong supporting area. See Illustration below on Page 2.
 - Connect all the wires and ground using (G) wire connectors by twisting matching wires as below
 - Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
 - Live Wire (L, Black) Black to Black Wire from junction box.
 - Neutral Wire (N, White) White to White Wire from junction box.
- Once all connected, proceed to next step.
7. Put (D) fixture body inside canopy cover (C) until it passes through the screws and fix it with (E) decorative nuts
8. You are now complete and can install light bulbs and glass/metal bars (Installation Map on Page 4)

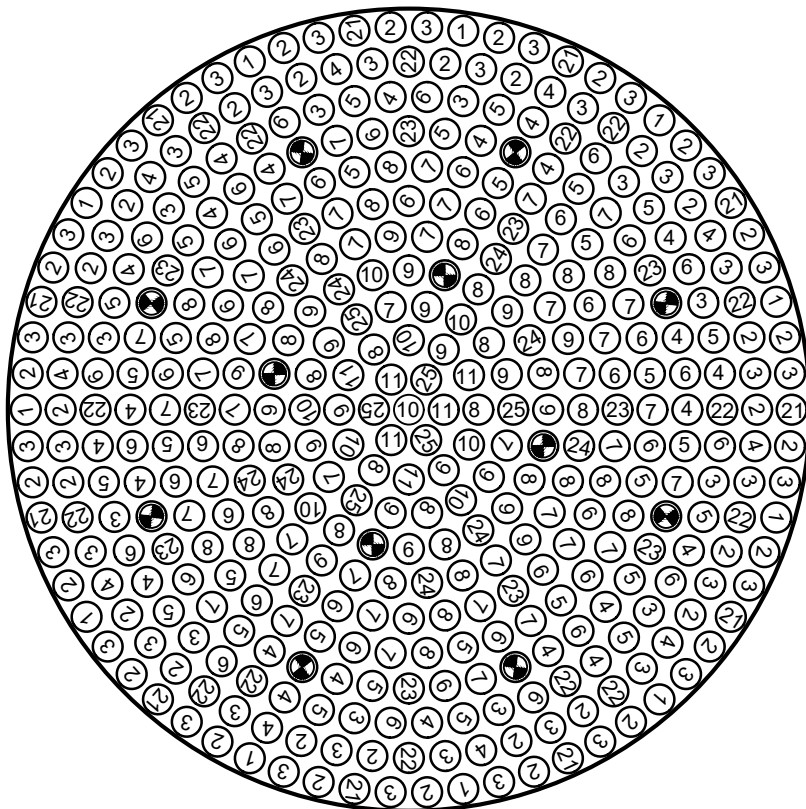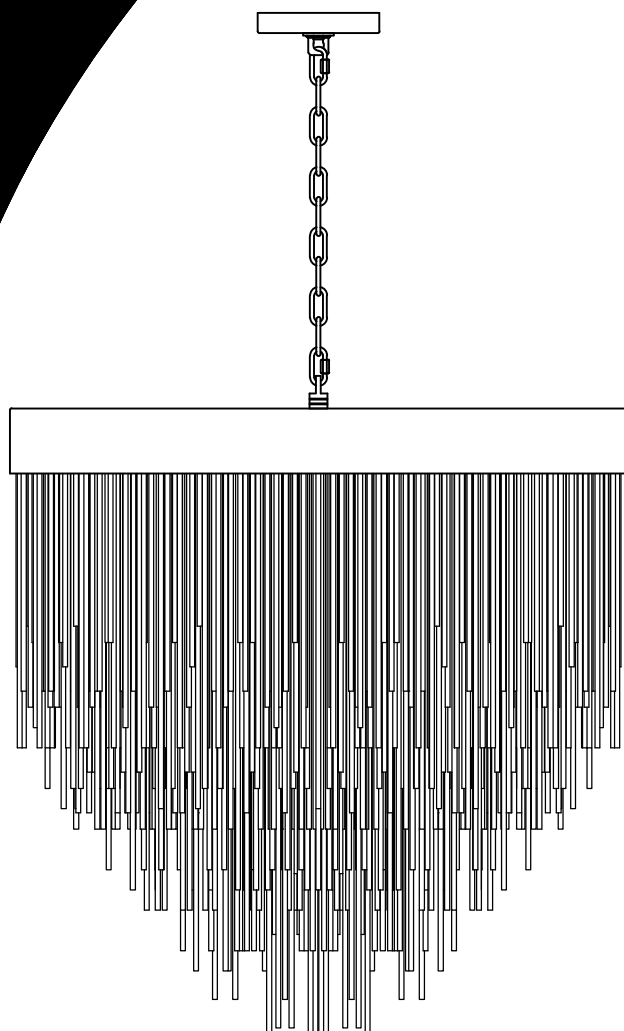

1	2	3	4	5	6	7	8	9	10	11	21	22	23	24	25
11pcs	42pcs	54pcs	34pcs	32pcs	44pcs	43pcs	35pcs	21pcs	9pcs	6pcs	11pcs	16pcs	12pcs	9pcs	6pcs