




**L I G H T I N G**

**ASSEMBLY AND INSTALLATION  
INSTRUCTIONS**


**ITEM NO.: CD10265/10/PN  
CD10264/10/AGB**

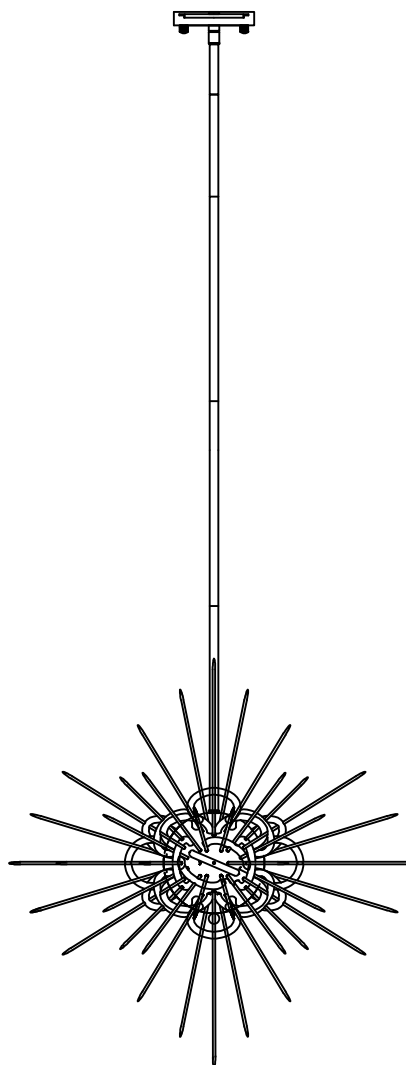


**NOTE:** Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

**STEP 1:**


**Put the metal rod (A) into the lamp body (B) and fixed it tightly.**

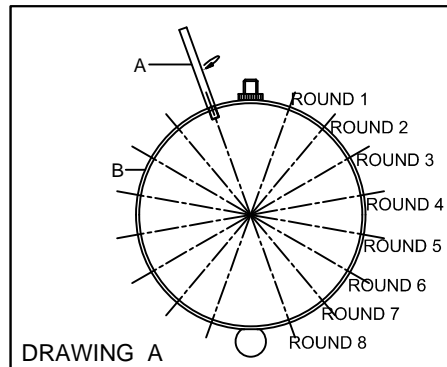

**DRAWING B**  
**Acrylic distribution view (K.H).**

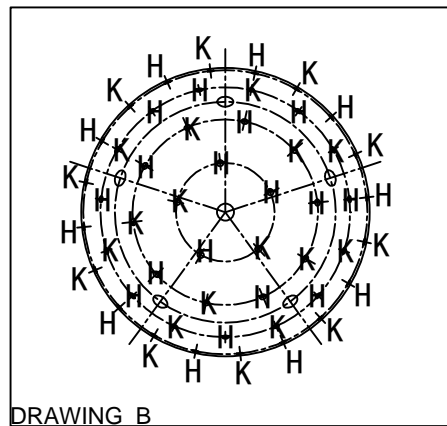


**DRAWING C**  
**As the drawing B and put the acrylic (H) 50PCS and acrylic (K) 50PCS on the lamp**

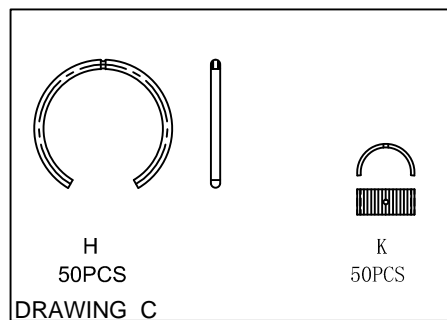

**DRAWING D**


After loading the acrylic(K) and(H) then place the plastic gasket(I) on the top of the acrylic to prevent it from slipping

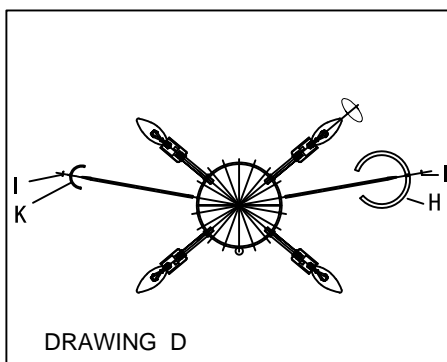

**NOTE:** Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


**STEP 2:**

Attach the Rod(D) assembly to fixture(C). In turn attach other Rod(E) and Rod(F).

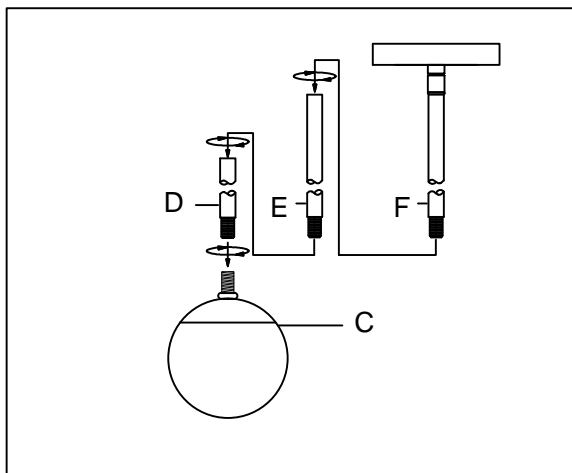


**STEP 3:**

Attach the Screws(G) to the Mounting Bar(I) by screwing in the Nipple and locking it on the opposite side with the Nut(J).

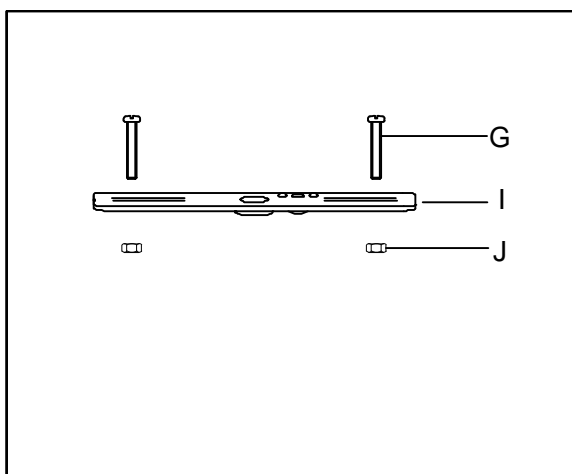

**STEP 4:**

Secure the Mounting Bar(N) to the Outlet Box(L) with the Mounting Screws(M). Tighten until snug.


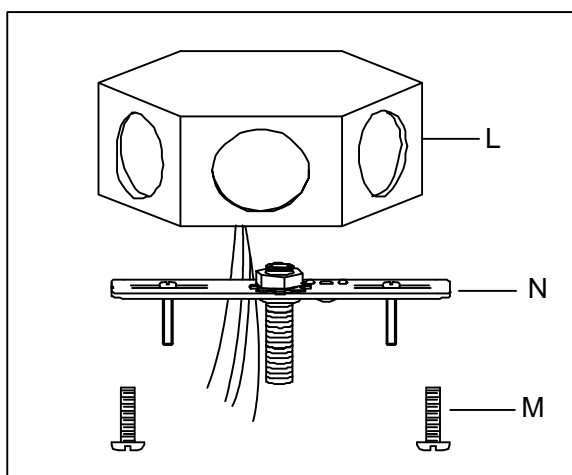


**NOTE:** Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

#### STEP 5:


Wrap the Ground Wire from the Fixture around the Ground Screw on the Mounting Bar and then connect the Ribbed Silver Wire from the Fixture to the White Wire (neutral wire) from the Outlet Box. Connect the Smooth Silver Wire from the Fixture to the Black Wire (live wire) from the Outlet Box. Cover the connections using the Wire Connectors.

**NOTE:** Black Wire inside Outlet Box may be red or smooth. White Wire inside Outlet Box may be ribbed.

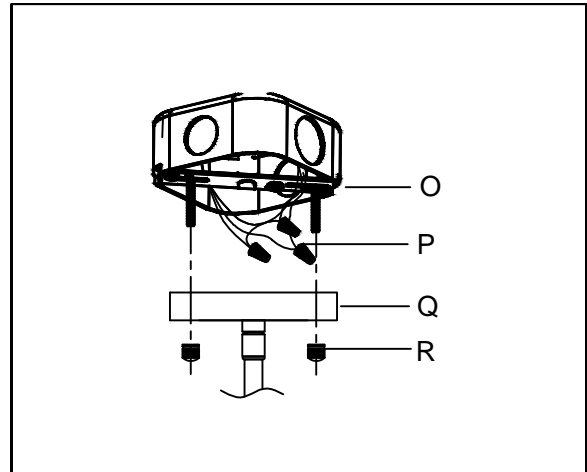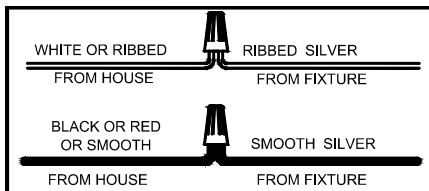

#### STEP 6:

Pass the Canopy(Q) through the Screws(O). Tighten until snug using the ring(R).

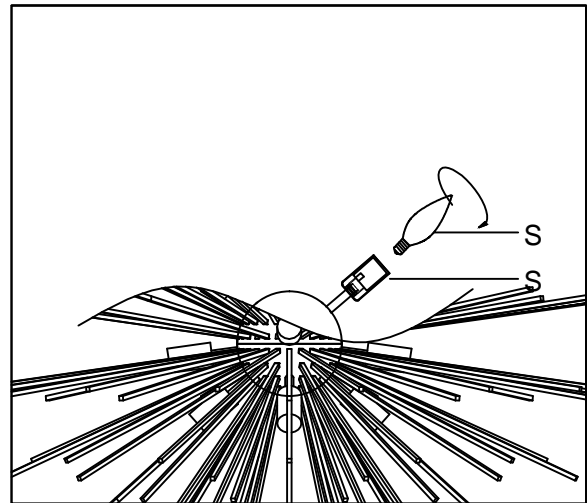

#### STEP 7:

Screw in the Bulbs. This fixture has been rated for up to 40 watt MAX Type B bulbs (NOT included).

#### Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.