

## PL11413/LED-10/AGB PL11414/LED-10/PN PL11415/LED-10/SBB Assembly and Installation Instructions

### WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.
4. This product is designed to be mounted on a correctly installed standard round or octagon junction box.
5. May require 2 people for installation.

**CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTINGSCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE ONLY TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall).**

### ASSEMBLY INSTRUCTIONS - CHANDELIER

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.

- A. Mounting Plate (1)
- B. Mounting Screws (2)
- C. Wire Connectors (3)
- D. Canopy Cover(1)
- E. Crystal cap (1)
- F. Thread Ring (1)
- G. 3" rod (1)
- H. 6" rod (1)
- I. 12" rod (3)
- J. Cylindrical Connector(1)
- K. Square tube (1)
- L. Long threading (1)
- M. Fixture Body (1)
- N. Crystal (10)
- O. Steel Cable Nut (1)

- 2.Pre-plan, make sure all Warnings and Cautions above have been completed.

- 3.Connect the 3" rod (G), 6" rod (H) and 12" rod (I) in sequence, have the power cable run through the connected rod, thread ring (F), canopy cover(D) and mounting plate(A), then screw the connected rod onto fixture body (M) and screw the other end to swivel of mounting plate(A).

- 4.Fit (A) mounting plate to the junction box using (B) mounting screws.

- 5.Before connect the input wires from the house we should connect the wires on canopy to the wires on fixture body first accordingly. (Detailed wire connection drawing please refer to the page 2 of 2).


- 6.You are now ready to install the (M) fixture body to the ceiling.

- Connect the safety cable to a secure strong supporting area.See Illustration below on Page 1.
- Connect all the wires and ground using (C) wire connectors by twisting matching wires as below.
  - Ground Wire (G, Green or Copper Wire)  
Green to Green or Copper to Green or Copper to Copper from junction box.
  - Live Wire (L, Black) Black to Black Wire from junction box.
  - Neutral Wire (N, White) White to White Wire from junction box.
  - Once all connected, proceed to next step.

- 7.Have the (E) crystal cap pass through the swivel and fixing (D) canopy cover to mounting plate with (F) thread ring.

- 8.You are now complete and can install (N) crystal by rotating.(Installation Map on Page 1)

Note: There is one 3 CCT Switch for 3000k-3500k-4000k adjustable.Please adjust to the color you like before using.

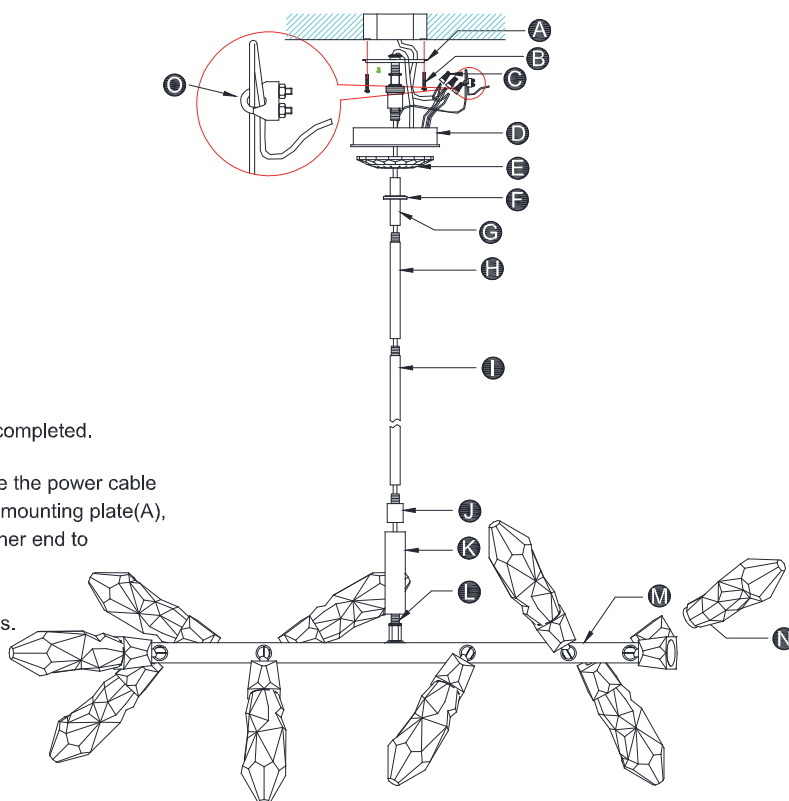


## PL11413/LED-10/AGB PL11414/LED-10/PN PL11415/LED-10/SBB Assembly and Installation Instructions


### WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.
4. This product is designed to be mounted on a correctly installed standard round or octagon junction box.
5. May require 2 people for installation.

**CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTINGSCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE ONLY TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall).**

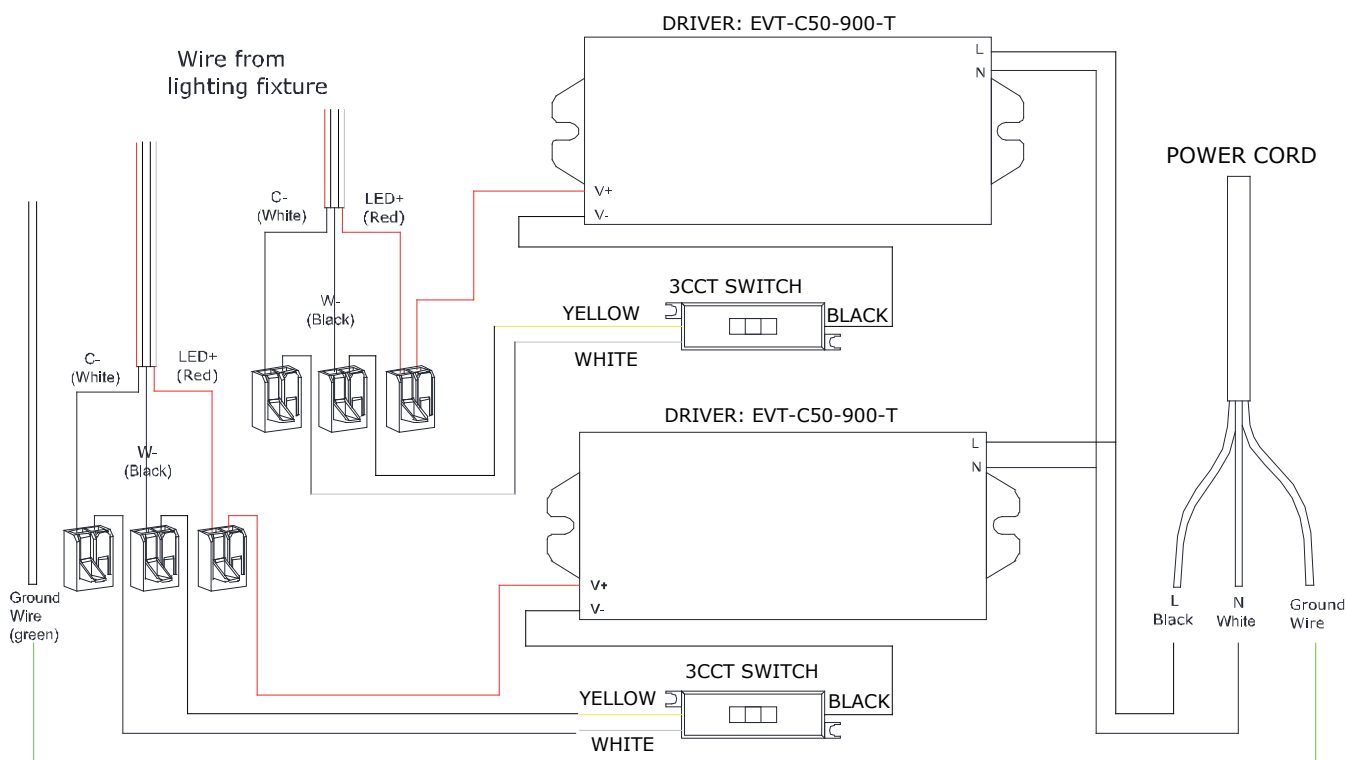

### SAFETY CABLE ASSEMBLY

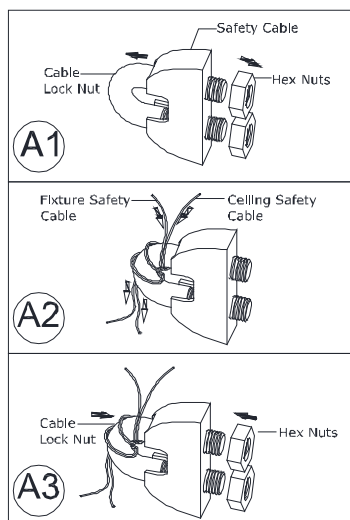

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.