


ZEDV

L I G H T I N G

ASSEMBLY AND INSTALLATION INSTRUCTIONS


ITEM NO.: CD10270/9/AGB

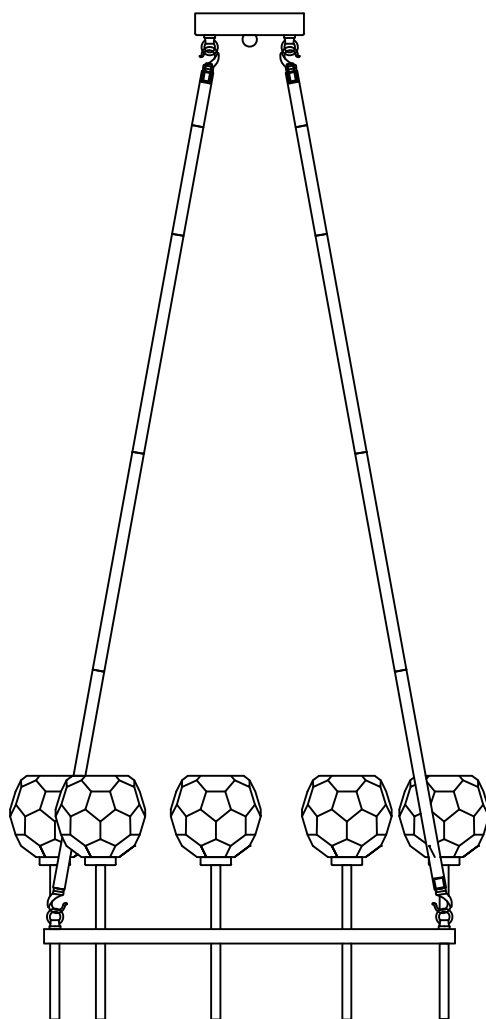

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP1:

Attach the Rod(B) assembly to fixture(A). In turn attach other Rod(C) and Rod(D).

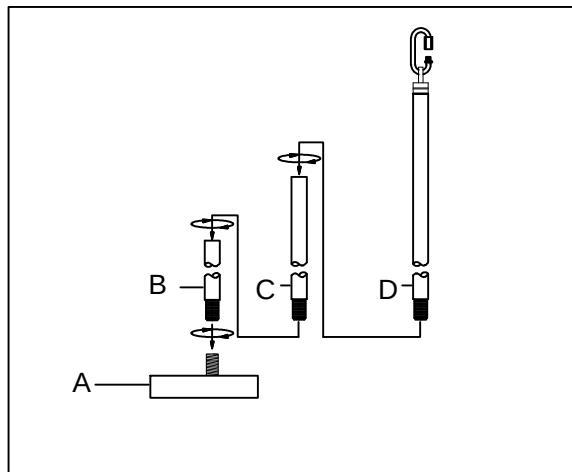


STEP 2:

Secure the Mounting Bar(N) to the Outlet Box(L) with the Mounting Screws(M). Tighten until snug.

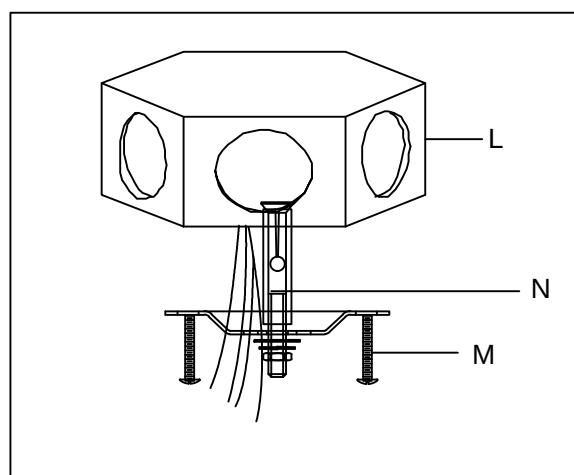

STEP 3:

Connect canopy(P) and lamp body (R) by stem (K)
3 PCS


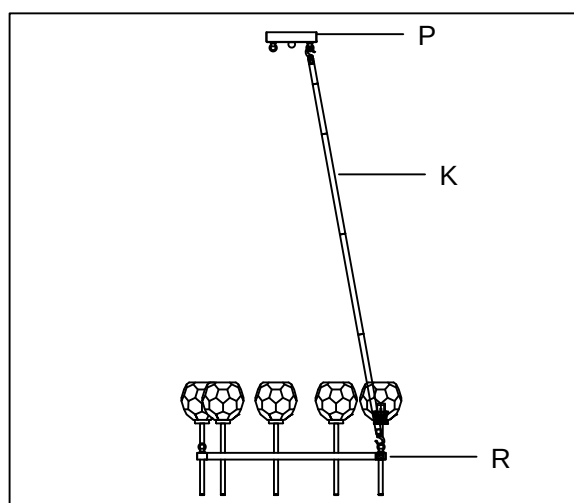


NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

STEP 4:

Wrap the Ground Wire from the Fixture around the Ground Screw on the Mounting Bar and then connect the Ribbed Silver Wire from the Fixture to the White Wire (neutral wire) from the Outlet Box. Connect the Smooth Silver Wire from the Fixture to the Black Wire (live wire) from the Outlet Box. Cover the connections using the Wire Connectors.


NOTE: Black Wire inside Outlet Box may be red or smooth. White Wire inside Outlet Box may be ribbed.

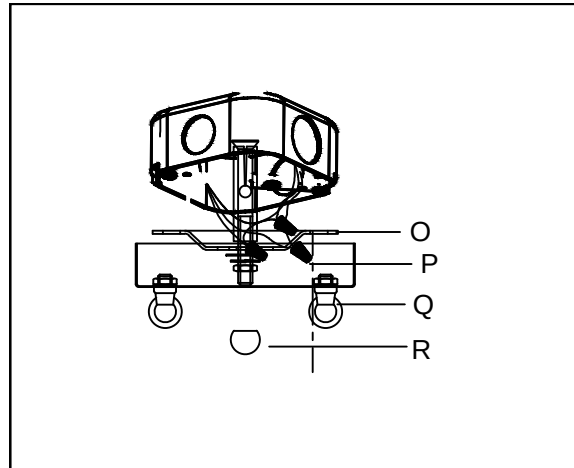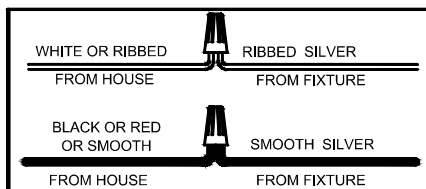

Fix the canopy (P) to the mounting plate (O) and locked by screw (R)

STEP5:


Swirl the crystal shade(H) into the lamp body(R) and put the G9 bulb into the socket (not included)

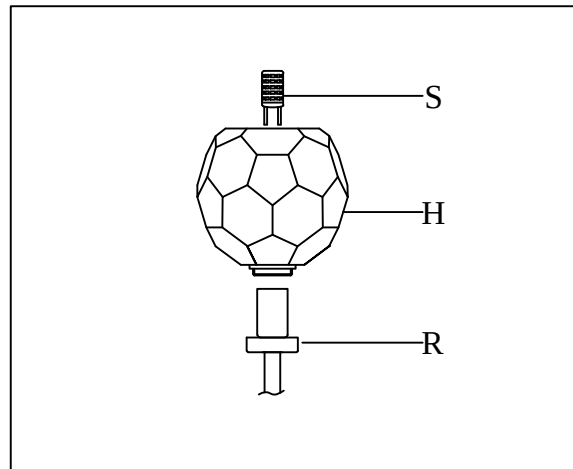

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.

SAFETY CABLE ASSEMBLY

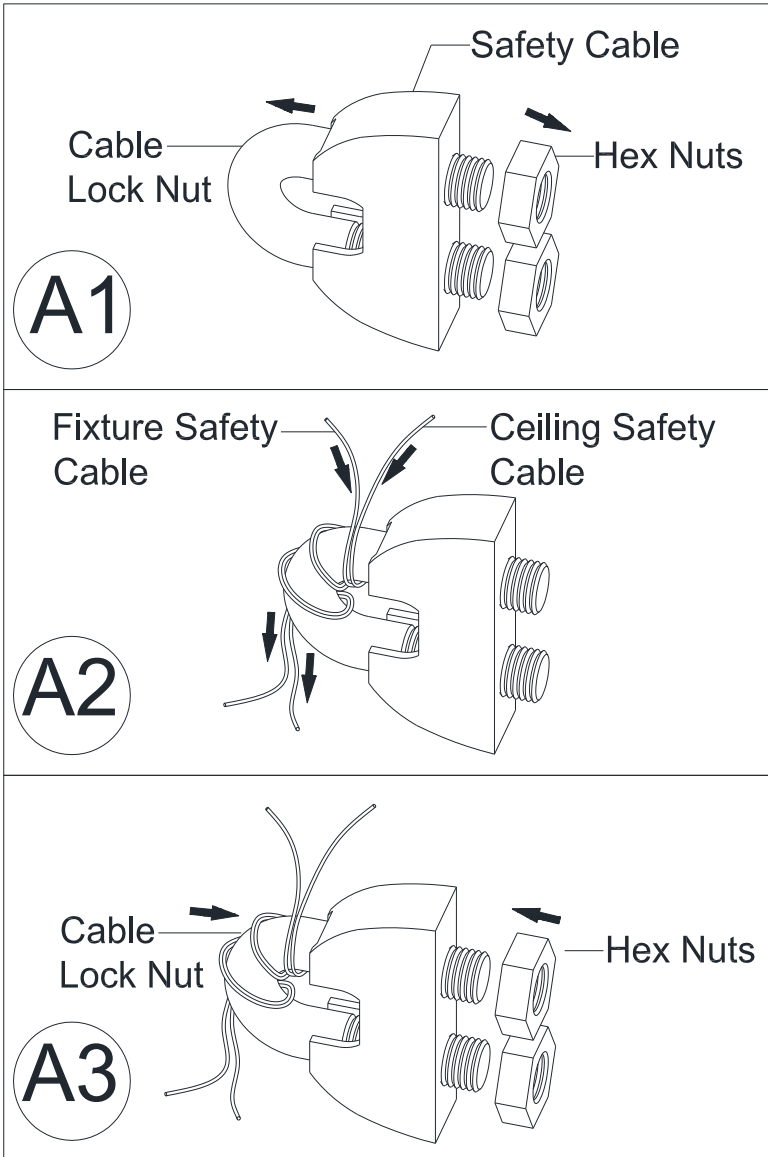

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.