


L I G H T I N G

## ASSEMBLY AND INSTALLATION INSTRUCTIONS

ITEM NO.: CD10378/3/AGB  
CD10379/3/PN

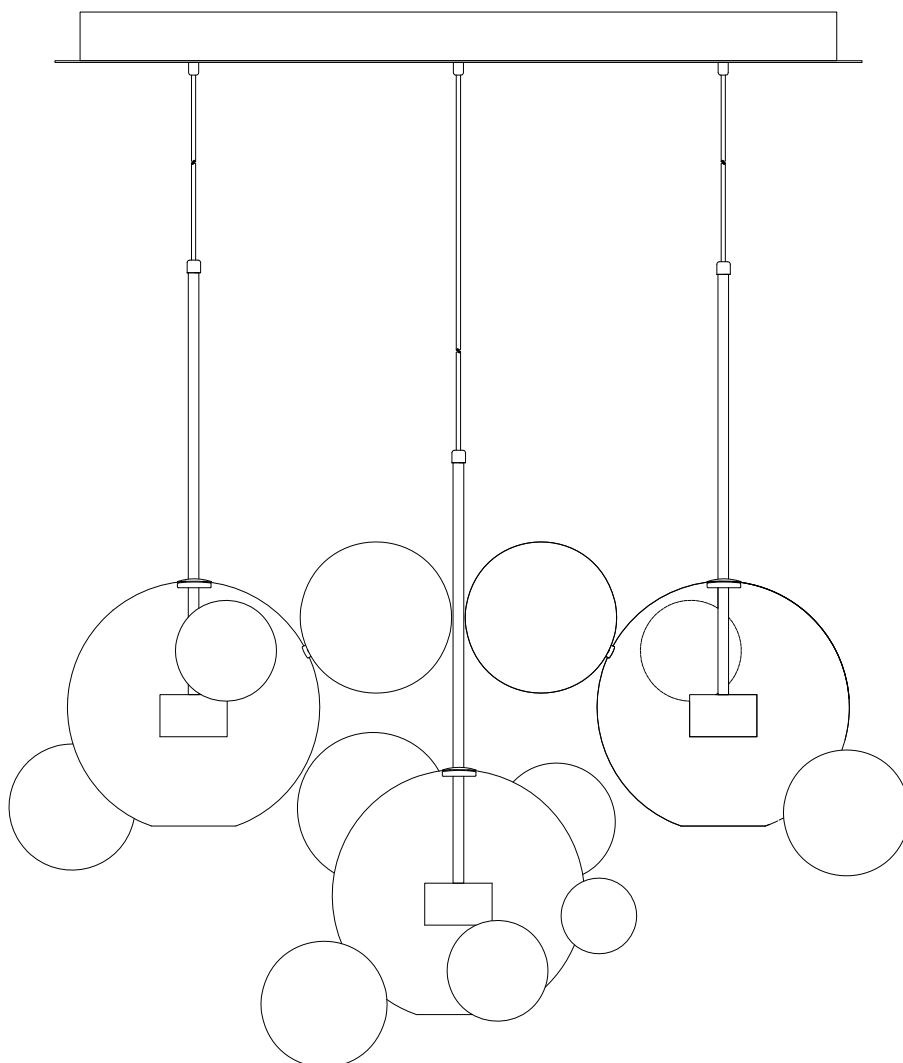


**FOR YOUR SAFETY**

**WARNING:**BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF:ETHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

**CAUTION:** THE PRODUCT SHOULD BE INSTALLED BY A QULIFID ELECTRICIAN THAT IS AWARE OF THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

**STEP 1:**


Secure the explosive screws(B) into ceiling accordingly, lock the fixture mounting screws onto mounting plate(C) and then fix mounting plate(C) onto outlet box (A not included) and ceiling with box screws(E) and explosive screws (B).

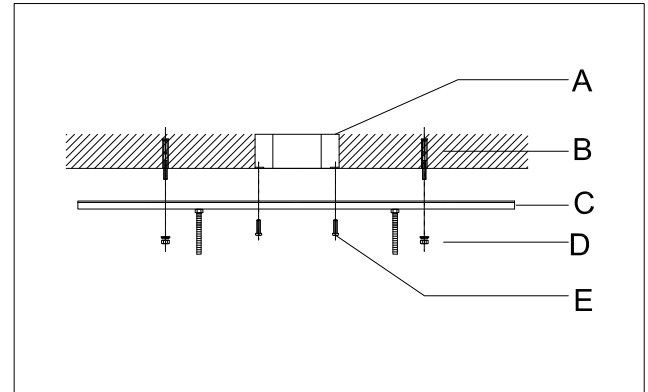

**STEP 2:**


Adjust the cable length and get the desired height, then lock it with hexagonal screws(G).

(Note:Make sure the hexagonal screws G had been tighten.)

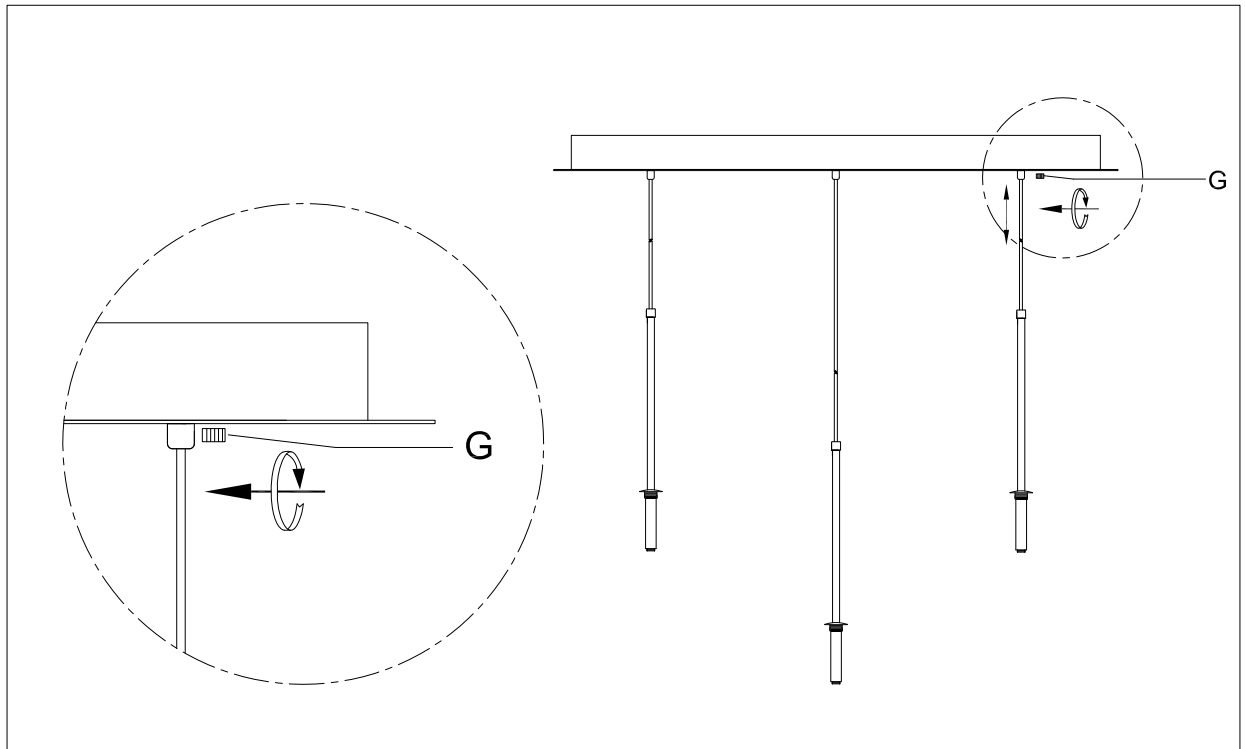


### STEP 3:

Wrap the Ground Wire from the fixture around the ground screw on the mounting plate.  
Connect the blue wire from the fixture to white wire (Neutral wire) from outlet box with wire connector.  
Connect the brown wire from the fixture to black wire (Live wire) from outlet box with wire connector.

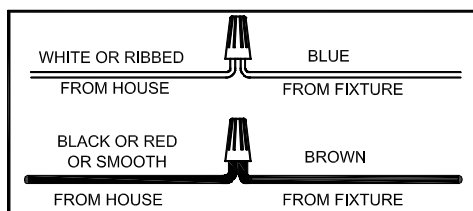

Note: It has 0-10V dimming wires, if you need this function please connect it to 0-10V dimmer. If not needed, the fixture will be full power.

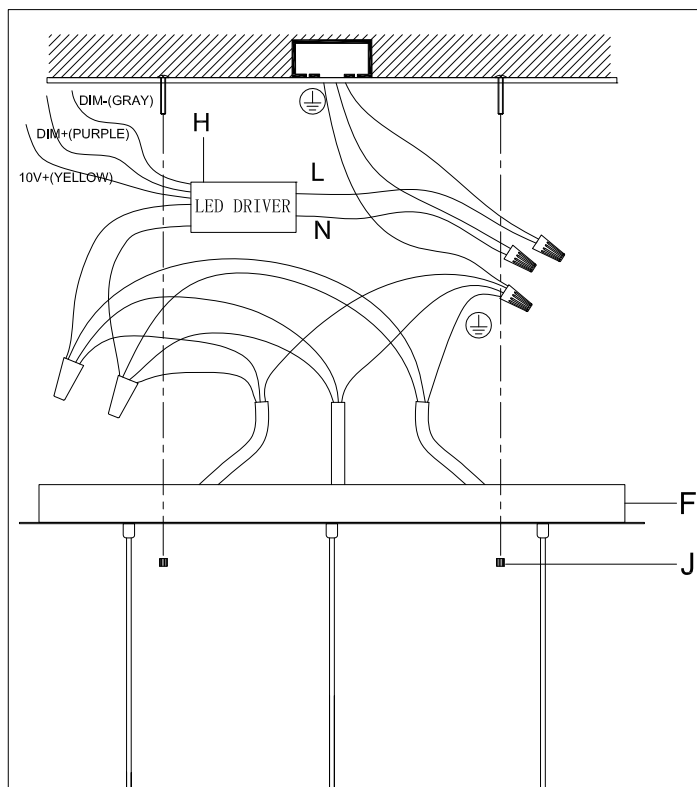


### STEP 4:

Align the canopy (F) to the outlet box against the mounting surface, allowing the fixture mounting screws to pass through the fixture canopy, then secure it with 2 pcs cap finials (J).



### STEP 5:

Allowing the biggest glass ball (K) to go through the fixture body (T), hold it by hand, then let the gasket (R) pass through the fixture body (T) and secure it by rotating the metal ring (S), finish locking the glass ball.

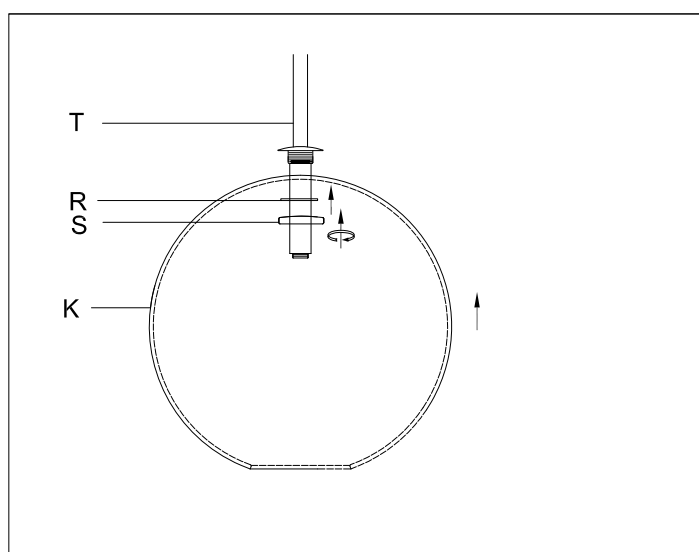

#### STEP 6:

Rotate the glass ball(O) into the hardware(M) on the biggest glass ball(K) and tighten. Different size of glass balls should be installed in the same way and their location like the image shown as on right.

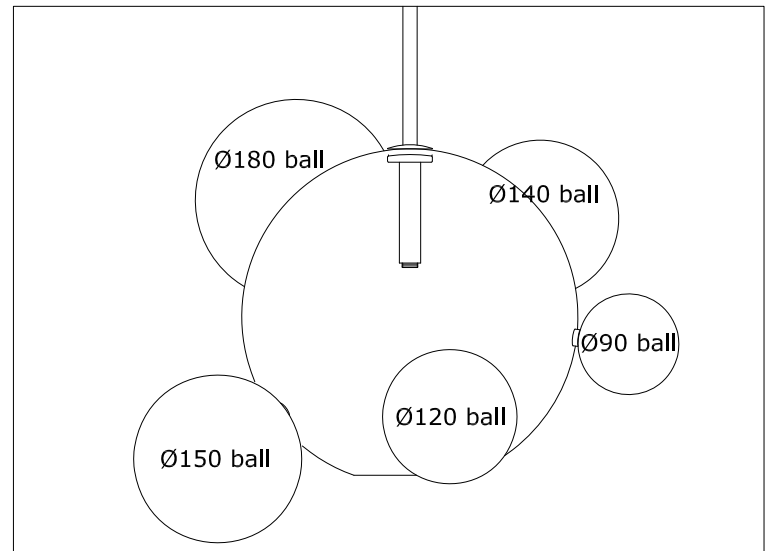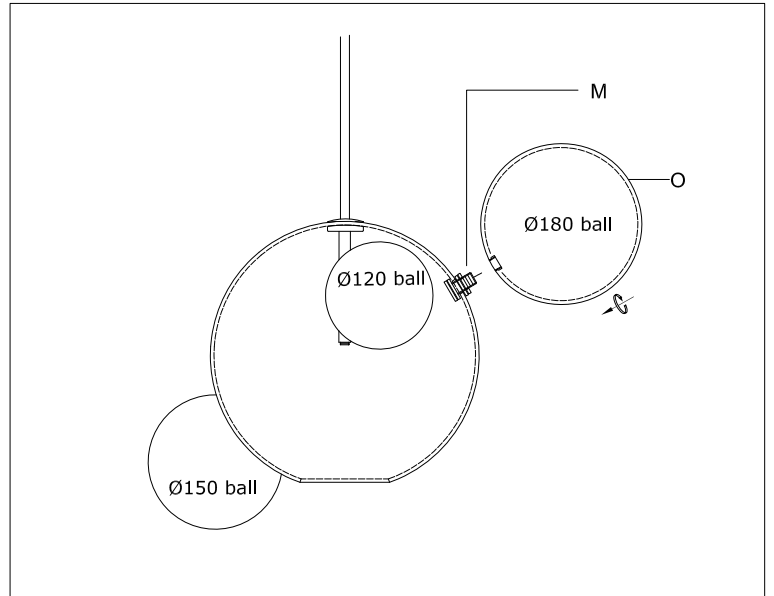

#### STEP 7:


Assemble the LED light source(P,2x3W,3000K) into the fixture body(T) from bottom of the biggest glass ball.

#### STEP 8:


Connect breaker and turn on Light.

#### Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.

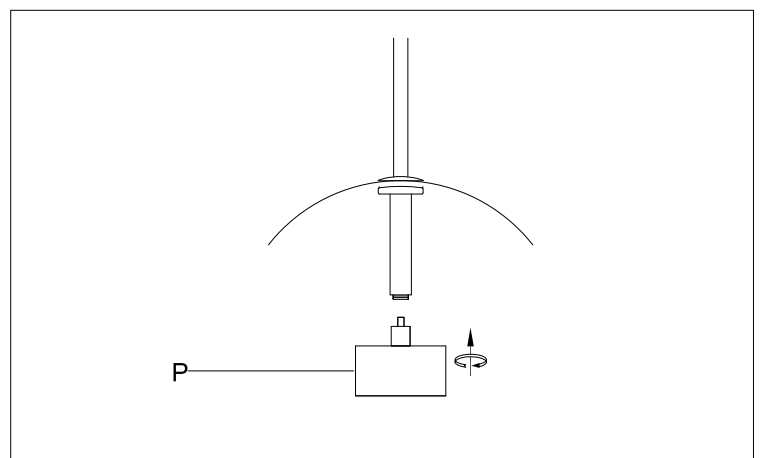

# SAFETY CABLE ASSEMBLY

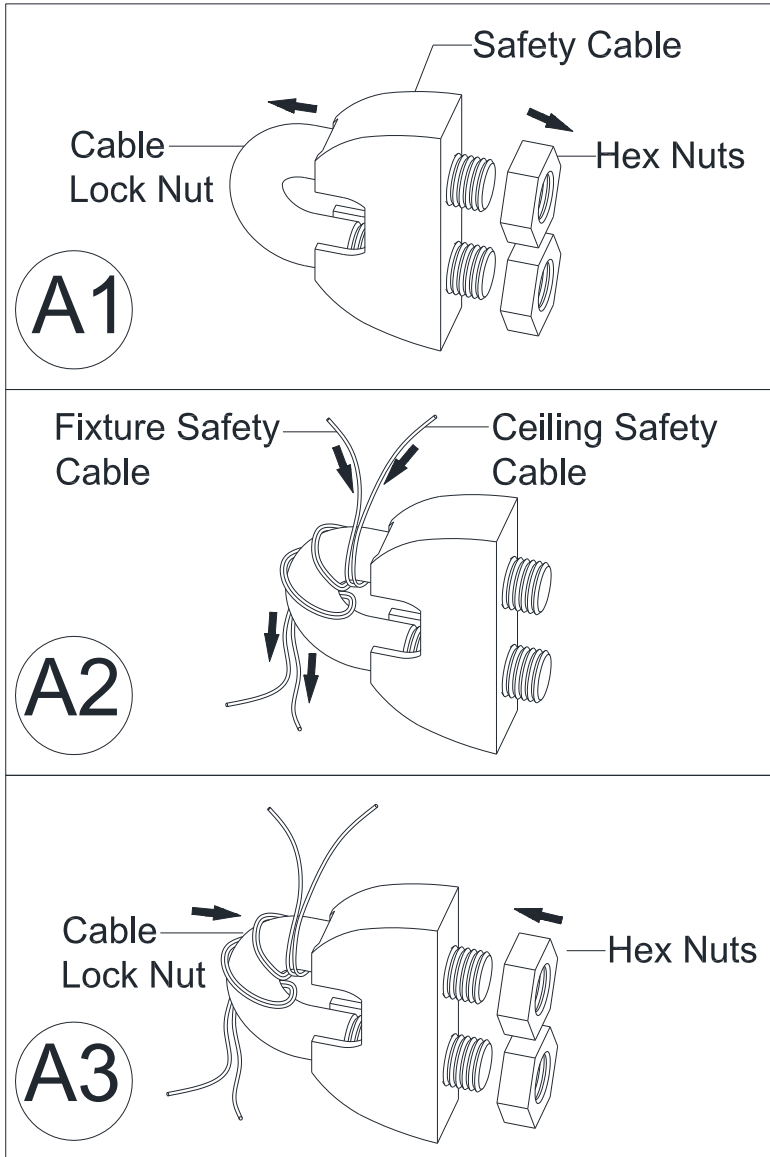

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.