


ZEDV

L I G H T I N G

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ITEM NO.: CD10406/24/P-AGB

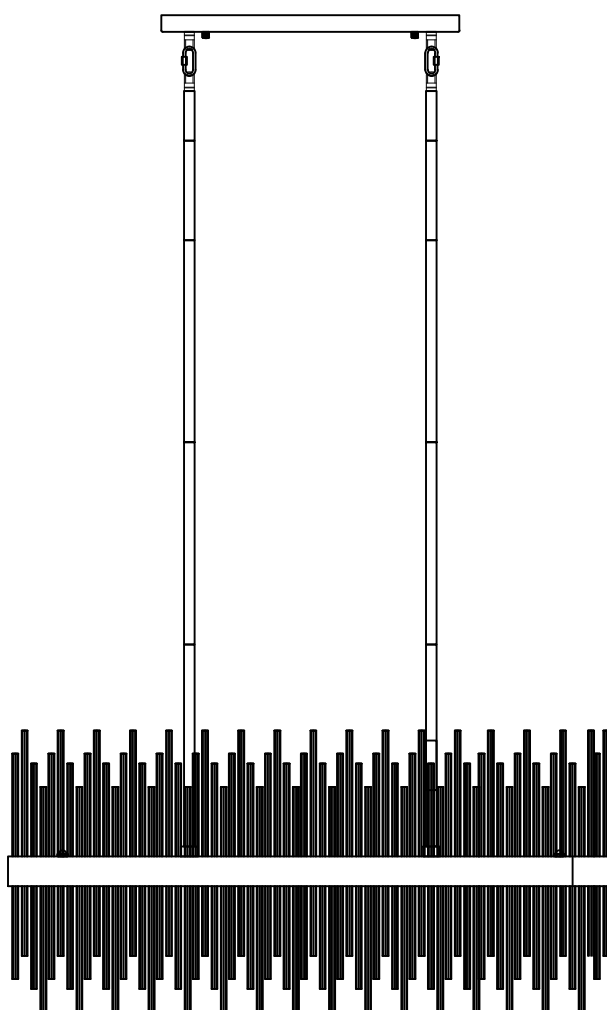


FOR YOUR SAFETY

WARNING:BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF:
ETHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

CAUTION: THE PRODUCT SHOULD BE INSTALLED BY A QULIFID ELECTRICIAN THAT IS AWARE OF THE
CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


STEP 1:

Assemble the Rods(B、C、 D) onto fixture body(A).
get the desired fixture height.

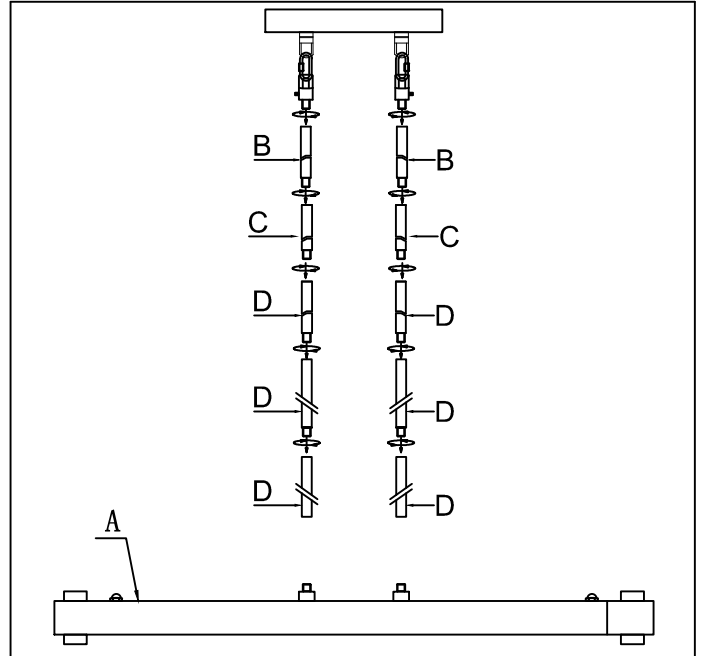


STEP 2:

Secure mounting plate(G) tight against on ceiling
by 4pcs metal anchors(E) and 4pcs nuts(H), and
use 2pcs screws(I) to secure the mounting
plate(G) on the junction box(F not include).

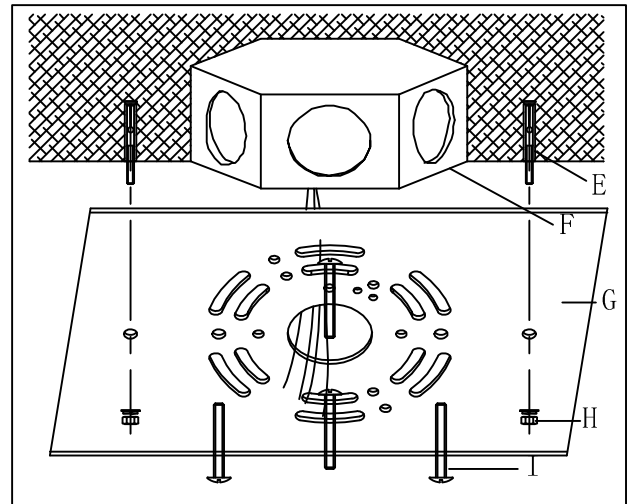

STEP 3:

Use the quick link(K) to hang top of two group rods onto
the ring(J) of canopy, and tighten the nuts on the quick
link(K).

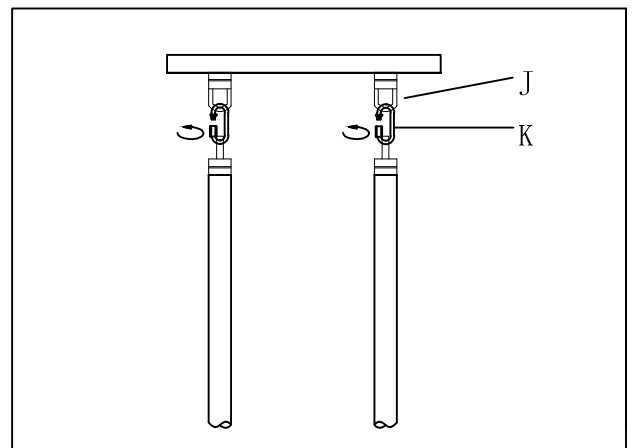



FOR YOUR SAFETY

WARNING:BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF:
ETHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

CAUTION: THE PRODUCT SHOULD BE INSTALLED BY A QULIFID ELECTRICAN THAT IS AWARE OF THE
CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


STEP 4:

Wrap the Ground wire from the fixture around the screw on the mounting plate.
Connect the Ribbed Silver Wire from the fixture to the white wire (Neutral wire) from Junction box with wire connector(L).
Connect the Smooth Silver Wire from the fixture to the black wire (Live wire) from junction box with wire connector(L).

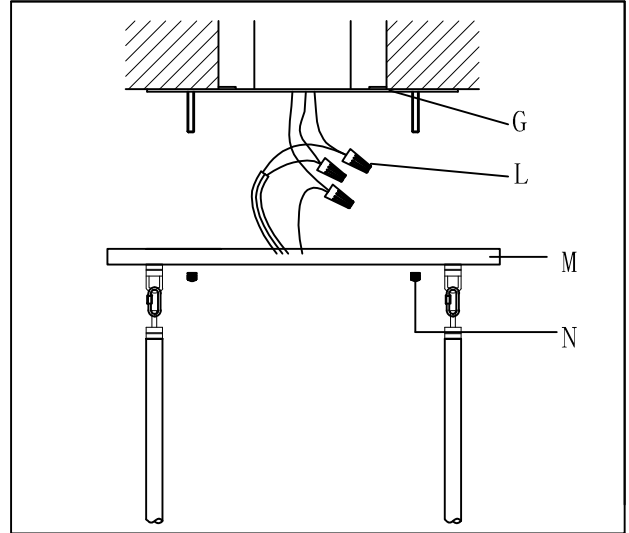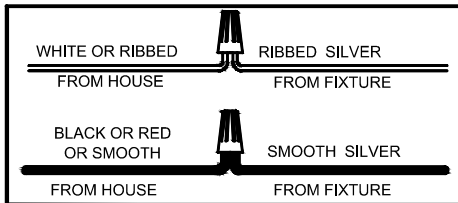

STEP 5:

Align the Canopy(M) with the mounting plate(G),
the mounting screws from mounting plate pass
through the Canopy holes secured tight with 2pcs
cap finials(N) on the mounting screws.

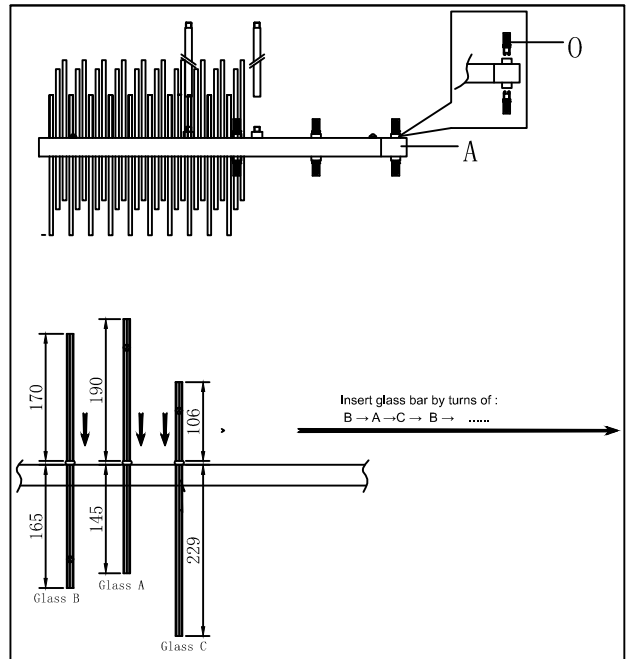

STEP 6:

Insert 24pcs G9 bulbs(O not include) into the
socket, then insert the Glass bars(by turns of: B
→ A → C → B) onto the fixture body(A), See
right picture.


STEP 7:

Connect breaker and turn on Light.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry
cloth. Avoid the use of harsh or abrasive chemicals
as they may damage the finish.

SAFETY CABLE ASSEMBLY

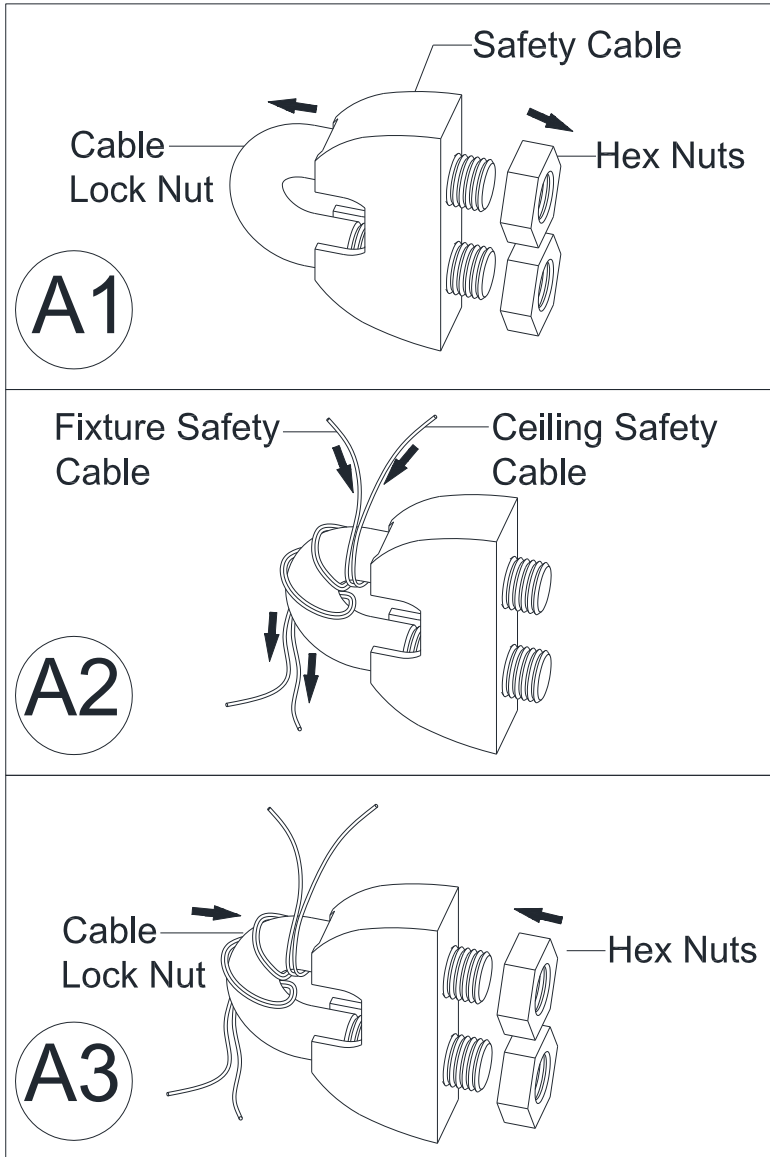

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.