

## P11706/E26/MW Assembly and Installation Instructions

### WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

**CAUTION:** HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall). THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX.

### ASSEMBLY INSTRUCTIONS - PENDANT

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.

- A. Mounting Plate (1)
- B. Mounting Screw (2)
- C. Wire Connectors (3)
- D. Canopy Cover (1)
- E. 3" Rod (1)
- F. 6" Rod (1)
- G. Thread Ring (1)
- H. 12" Rod (3)
- I. Fixture Body (1)
- J. Knurl (1)

2. Pre-plan, make sure all Warnings and Cautions above have been completed.

3. Connect the 3" rod (E), 6" rod (F) and 12" rod (H) in sequence, have the power cable run through the connected rod, thread ring (G), canopy cover (D) and mounting plate (A), then screw the connected rod onto fixture body (I) and screw the other end to swivel of mounting plate (A).

4. Fit (A) mounting plate to the junction box using (B) mounting screws.


5. You are now ready to install the (I) fixture body to the ceiling.
  - Connect all the wires and ground using (C) wire connectors by twisting matching wires as below.

- Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
- Live Wire (L, Black) Black to Black Wire from junction box.
- Neutral Wire (N, White) White to White Wire from junction box.
- Once all connected, proceed to next step.

6. Put (D) canopy cover to (A) mounting plate and align the holes then secure with (G) threading ring.

7. You are now complete and can install the bulb and glass shade (not included). (Installation Map on Page 1)

8. If you need to switch the (K) glass lamp shade (not included) to (M) alabaster lamp shade (not included), remove (J) original knurl and replace it with (L) new knurl (need to buy separately) which is matching with alabaster, finally screw the knurl onto the (I) fixture body.

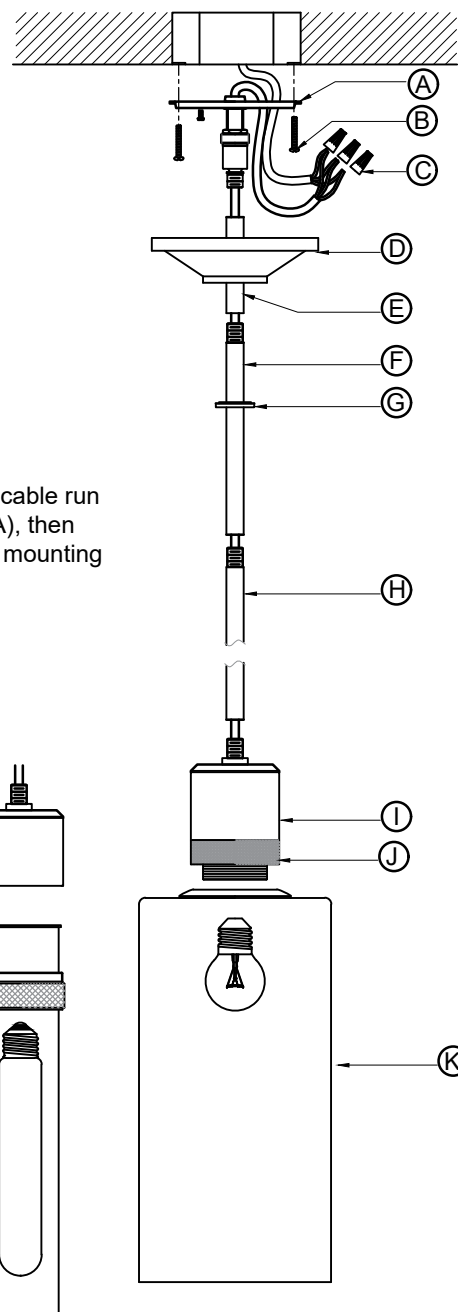

## P11706/E26/MW Assembly and Installation Instructions

### WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

**CAUTION:** HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall).

THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX.

### ASSEMBLY INSTRUCTIONS - PENDANT

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.
  - A. Mounting Plate (1)
  - B. Mounting Screw (2)
  - C. Wire Connectors (3)
  - D. Canopy Cover (1)
  - E. Machine parts (2)
  - F. Thread Ring (1)
  - G. Wire (1)
  - H. Fixture Body (1)
  - I. Knurl (1)
2. Pre-plan, make sure all Warnings and Cautions above have been completed.
3. Fit (A) mounting plate to the junction box using (B) mounting screws.
4. Have the (G) wire run through machine part (E), thread ring (F), canopy cover (D) and mounting plate (A), fixing the bottom machine part (E) to fixture body and screw top machine part (E) to swivel of mounting plate (A), secure the wire (G) with grub screws on the sides of the 2 machine parts (E).
5. You are now ready to install the fixture to the ceiling.
  - Connect all the wires and ground using (C) wire connectors by twisting matching wires as below.
    - Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
    - Live Wire (L, Black) Black to Black Wire from junction box.
    - Neutral Wire (N, White) White to White Wire from junction box.
    - Once all connected, proceed to next step.
6. Fixing (D) canopy cover to mounting plate with (F) thread ring.
7. You are now complete and can install the bulb and glass shade (not included). (Installation Map on Page 1)
8. If you need to switch the (J) glass lamp shade (not included) to (L) alabaster lamp shade (not included), remove original (i) knurl and replace it with (K) new knurl (need to buy separately) which is matching with alabaster, finally screw the knurl onto the (H) fixture body.

