

MP10901/LED/AGB, MP10902/LED/MW, MP10903/LED/PN, MP10904/LED/SBB Assembly and Installation Instructions

WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall). THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX.

ASSEMBLY INSTRUCTIONS - PENDANT

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.

Notes: If switching to rod suspension, you need to buy the rods and canopy set additionally.

- A. Mounting Plate (1)
- B. Mounting Screws (2)
- C. Wire Connectors (3)
- D. Canopy screws (2)
- E. Canopy (1)
- F. Wire (1)
- G. Fixture Body (1)
- H. Glass shade (1)

2. Pre-plan, make sure all Warnings and Cautions above have been completed.

3. Install (A) mounting plate to junction box with (B) mounting screws.

4. Before connect the input wires from the house we should connect the wires on canopy to the wires on fixture body first accordingly. (Detailed wire connection drawing please refer to the page 2 of 2).

5. You are now ready to install the (G) fixture body to the wall.

- Connect all the wires and ground using (C) wire connectors by twisting matching wires as below.

- Ground Wire (G, Green or Copper Wire)

Green to Green or Copper to Green or Copper to Copper from junction box.

- Live Wire (L, Black) Black to Black Wire from junction box.


- Neutral Wire (N, White) White to White Wire from junction box.

- Once all connected, proceed to next step.

6. Put (G) fixture body over (A) mounting plate and align the holes then secure with (D) canopy screws.

7. You are now complete and can install (H) glass shade. (Installation Map on Page 1)

Note: There is one 3 CCT Switch for 3000k-3500k-4000k adjustable. Please adjust to the color you like before using.

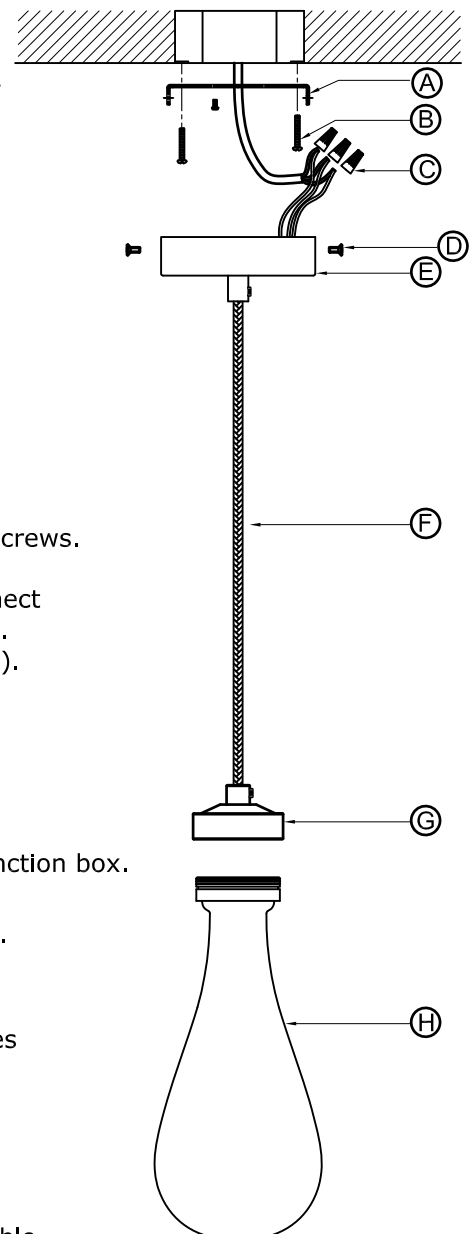

MP10901/LED/AGB,MP10902/LED/MW,MP10903/LED/PN,
MP10904/LED/SBB

Assembly and Installation Instructions

Detailed wire connection drawing

(Connect the wires on canopy to the wires on fixture body marked with same labels accordingly.)

