


ASSEMBLY AND INSTALLATION INSTRUCTIONS


ITEM NO.: MP40035/1/AGB ITEM NO.: MP40036/1/PN



NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP1:

Assemble the Rods onto fixture body(A). get the desired fixture height.

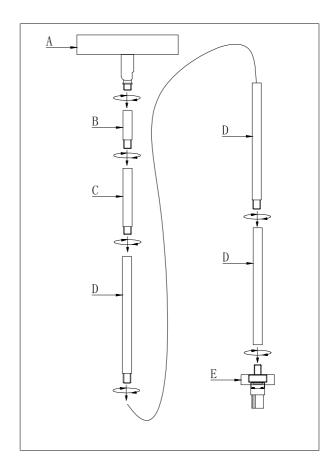

STEP 2:

Secure mounting plate (E) tight on the junction box (D not include) by 2pcs screws (F).




NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the powerby turning off the circuit breaker or removing the fuse from the fuse box.


STEP 3:

Wrap the Ground wire from the fixture around the screw on the mounting plate.

Connect the white wire from the fixture to the white wire (Neutral wire) from Junction box with wire connector(J)


Connect the Black wire from the fixture to the black wire (Live wire) from junction box with wire connector(J)





STEP 4:

Align the Canopy (K) with the mounting plate(I), the mounting screws from mounting plate pass through the Canopy holes secured tight with 2pcs cap finials (L) on the mounting screws.



STEP 4:

Assemble the crystal shade(M) onto the Metal holder(O) insert G9 bulb (N not included) into the socket. When you load and unload the crystal, use your hand to hold the lamp body to prevent crystal falling.

STEP 5:

Connect breaker and turn on Light.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.