

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**ITEM NO.: MP40037-1/AGB** 


ITEM NO.: MP40038-1/PN



NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


## STEP 1:

Assemble canopy(F) and the Rods(B) onto fixture body(A). get the desired fixture height.




## STEP 2:

Secure mounting plate (D) tight on the junction box (C not include) by 2pcs mounting screws (E).



## STEP 3:

Use the movable buckle (H) connect mounting plate ring (G) and Rods, and tighten the nuts on the movable buckle (H).




Page 2 of 3

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

#### STEP 4:


Wrap the Ground wire from the fixture around the screw on the mounting plate.

Connect the white wire from the fixture to the white wire (Neutral wire) from Junction box with wire connector(I) Connect the Black wire from the fixture to the black wire (Live wire) from junction box with wire connector(I)



## STEP 5:

Fix the Canopy (J) onto ceiling by collar (J).

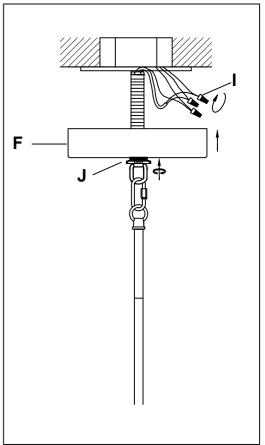

# STEP 6:

Put on1pcs GU10 5W LED bulb(K not include) into the socket. And assemble the Acrylic shade on to Fixture body (A).


## STEP 7:

Connect breaker and turn on Light.

# Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth.

Avoid the use of harsh or abrasive chemicals as they may damage the finish.

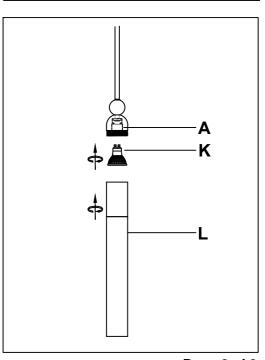

Page 3 of 3