


# **ZEDV**

## **L I G H T I N G**

### **ASSEMBLY AND INSTALLATION INSTRUCTIONS**


**ITEM NO.: P30069/4/PN**

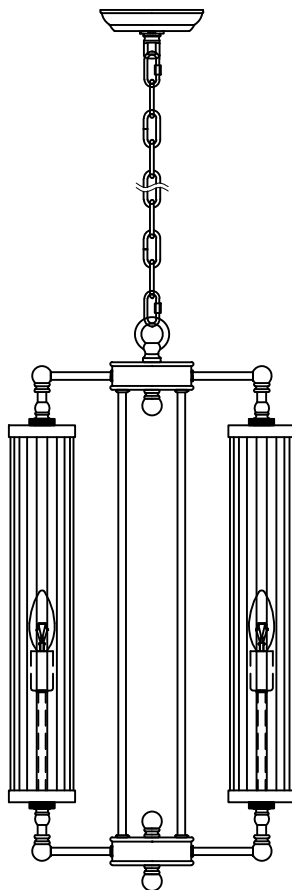

**NOTE:** Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


### STEP 1:

Screw the bulb. This Fixture has been rated for up to 40 Watt Max Type B Candelabra Bulbs (NOT Included). Then make the Checking Ring(D) and Dome(C) fall into the bottom, put the glass tube(A), tighten the glass tube(A) use the Checking Ring(D) and Dome(C). Repetitive above operation install other glass tube.

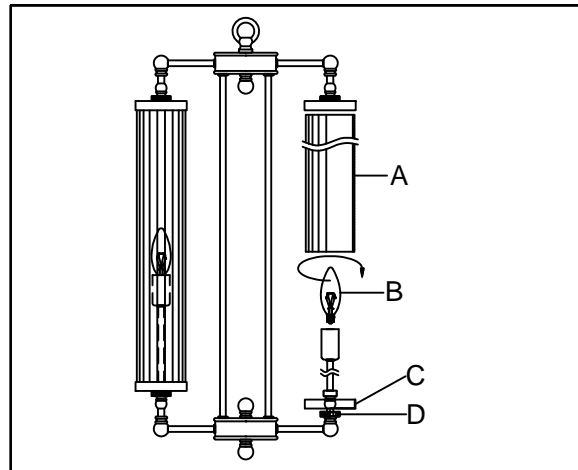


### STEP 2:

Attach the Nipple (H) to the Mounting Bar (G) by screwing in the Nipple and locking it on the opposite side with the Lock Washer (F) and Nut (E).

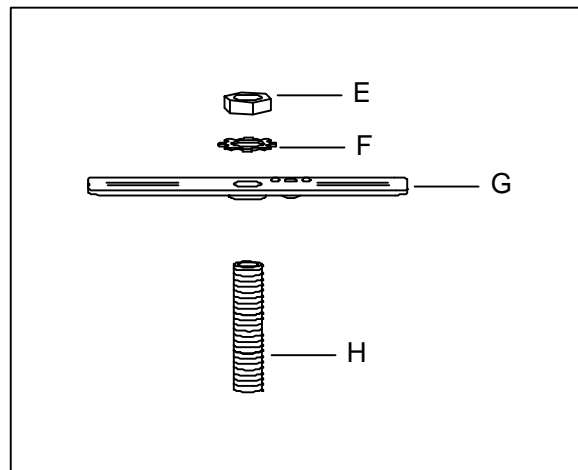

### STEP 3:


Secure the Mounting Bar (G) to the Outlet Box with the Mounting Screws (K). Tighten until snug.

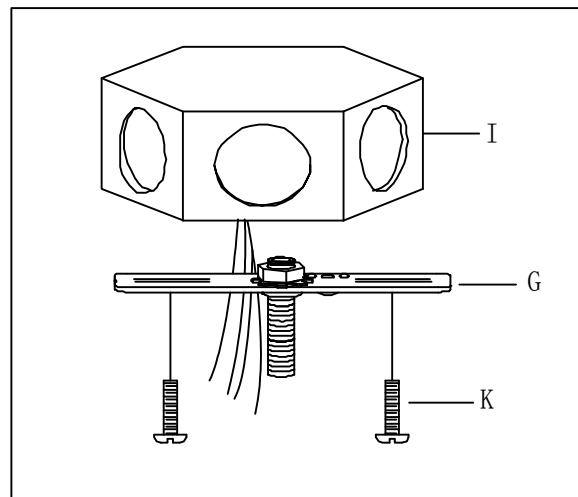

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP 4:

Attach the Canopy Loop(N) and Nut(M) into place on the Mounting Bar(G).

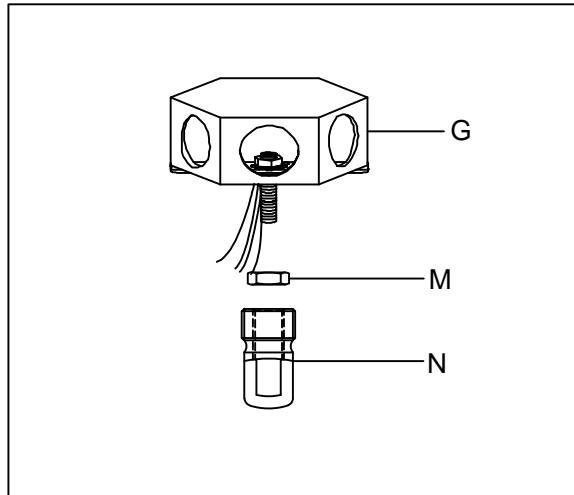


STEP 5:

Connect the fixture loop(P) to the Canopy chain loop using the chain link(O).

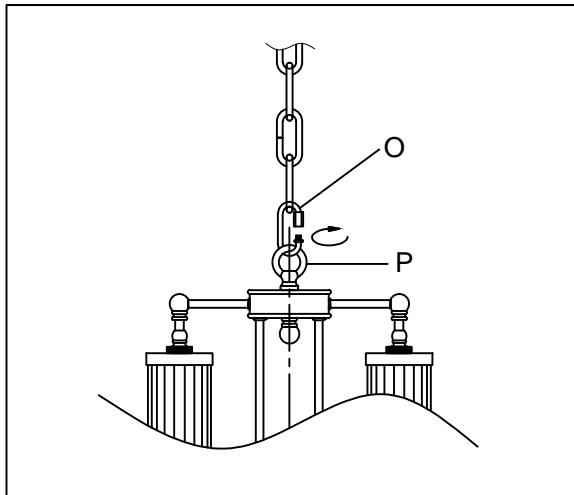

STEP 6:

Pass the chain through the Canopy (S) and Collar (T). Connect Canopy Loop (N) and chain with the chain link (R). Fix the Canopy (S) into the ceiling.


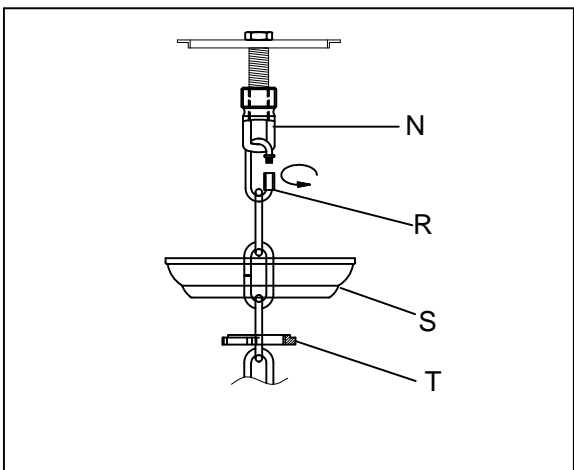


**NOTE:** Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

**STEP 7:**

Wrap the Ground Wire from the Fixture around the Ground Screw on the Mounting Bar (G) and then connect the Ribbed Silver Wire from the Fixture to the White Wire (neutral wire) from the Outlet Box. Connect the Smooth Silver Wire from the Fixture to the Black Wire (live wire) from the Outlet Box. Cover the connections using the Wire Connectors (O).

**NOTE:** Black Wire inside Outlet Box may be red or smooth. White Wire inside Outlet Box may be ribbed.

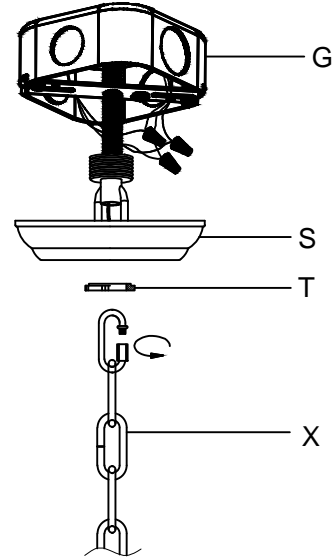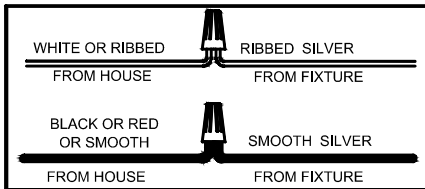

**STEP 10:**

Connect breaker and turn on Light.

**Cleaning & Care:**

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.