


ASSEMBLY AND INSTALLATION INSTRUCTIONS

ITEM NO.: P30103/4/AGB P30104/4/PN

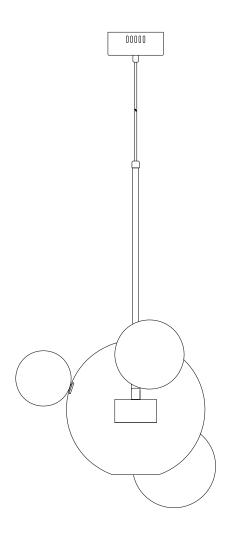

FOR YOUR SAFETY


WARNING:BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF:ETHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

CAUTION: THE PRODUCT SHOULD BE INSTALLED BY A QULIFID ELECTRICAN THAT IS AWARE OF THE CONSTRUCTION

AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

STEP 1:


Secure the mounting plate(B) tight onto the outlet box (C not included) with box screws(A,2pcs).



STEP 2:

Adjust the cable length and get the desired height, then lock it with hexagonal screws(E).


(Note:Make sure the hexagonal screws E had been tighten.)




STEP 3:

Wrap the Ground Wire from the fixture around the ground screw on the mounting plate. Connect the white or blue wire from the fixture to white wire(Neutral wire) from outlet box with wire connector.

Connect the black or brown wire from the fixture to black wire(Live wire) from outlet box with wire connector.




Note: It have 0-10V dimming wires, if need this function please connect it to 0-10V dimmer. If not need, the fixture will be full power.

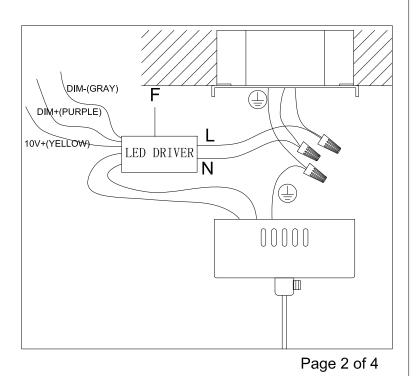


STEP 4:

Align the canopy(D) to the outlet box against mounting surface then secure it with 2pcs screws(G) from side.

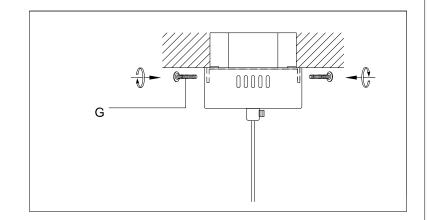


STEP 5:

Allowing the biggest glass ball(K) to go through the fixture body(J),hold it by hand then let the gasket(H) pass through the fixture body(J) and secure it by rotating the metal ring(I),finish locking the glass ball.

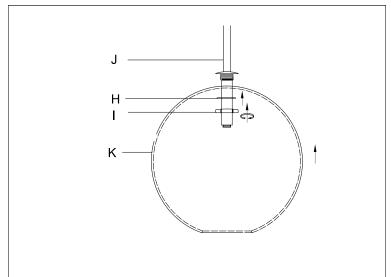


STEP 6:

Rotate the glass ball(O) into the hardware(M) on the biggest glass ball(K) and tighten. Different size of glass balls should be installed in the same way and their location like the image shown as on right.

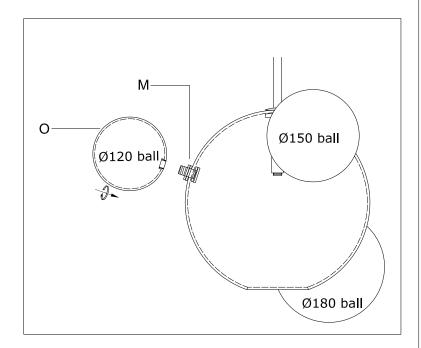

STEP 7:

Assemble the LED light source(P,2x3W,3000K) into the fixture body(J) from bottom of the biggest glass ball.

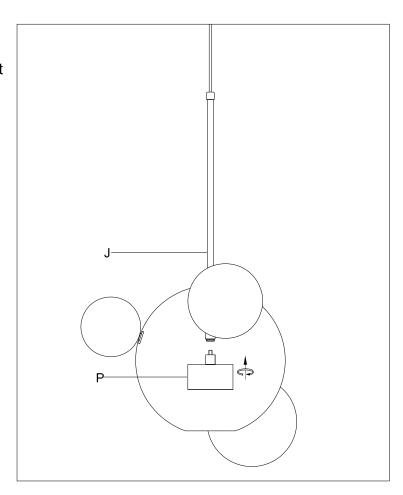

STEP 8:

Connect breaker and turn on Light.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish.