

PL11617/LED-56/AGB, PL11618/LED-56/MW, PL11619/LED-56/PN, PL11620/LED-56/SBB Assembly and Installation Instructions

WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.

CAUTION: HEAVY FIXTURE, THE JUNCTION BOX NEEDS TO BE REINFORCED BEFORE INSTALLATION, ALL MOUNTING SCREWS MUST SCREW INTO A MINIMUM OF 1" OF WOOD BEHIND THE DRYWALL. DO NOT MOUNT THIS FIXTURE JUST TO DRYWALL. (All wood that you screw into must be secured to cross beams/ceiling joists behind the drywall). THIS PRODUCT IS DESIGNED TO BE MOUNTED ON A CORRECTLY INSTALLED STANDARD ROUND OR OCTAGON BOX. TWO PERSON INSTALLATION

ASSEMBLY INSTRUCTIONS - PENDANT

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.

- A. Plastic Anchors (6)
- B. Mounting Plate (1)
- C. Self-tapping screw (6)
- D. Wire connectors (3)
- E. Canopy Cover(1)
- F. Canopy Screws (4)
- G. 3" Rod (2)
- H. 6" Rod (2)
- I. 12" Rod (6)
- J. Fixture Body (1)
- K. End Cap (1)
- L. Big Crystal (5)
- M. Small Crystal (2)
- N. Steel Cable (2)

2. Pre-plan, make sure all Warnings and Cautions above have been completed.

3. Connect the (G) 3" rod , (H) 6" rod and (I) 12" rod in sequence, have the power cable run through the connected rod, (E) canopy cover, swivel, then screw the connected rod onto (J) fixture body.

4. Install (B) mounting plate on the junction box(not included) and ceiling by mounting screws and (C) self-tapping screws respectively.

5. Before connect the input wires from the house we should connect the wires on canopy to the wires on fixture body first accordingly. (Detailed wire connection drawing please refer to the page 2 of 2).

6. You are now ready to install the fixture to the ceiling.

You will require minimum two people to complete the install.

- First connect the safety cable to a secure strong supporting area. See Illustration below on Page 1.

- Connect all the wires and ground using (D) wire connectors by twisting matching wires as below.

- Ground Wire (G, Green or Copper Wire)
Green to Green or Copper to Green or Copper to Copper from junction box.

- Live Wire (L, Black) Black to Black Wire from junction box.


- Neutral Wire (N, White) White to White Wire from junction box.

Once all connected, proceed to next step.

7. Raise the (E) canopy cover to the affixed mounting plate (B), until it is flush to ceiling. Secure with (F) Canopy screws.

8. Remove the above screw at the end of the (J) fixture body and the (K) end cap, slide the crystal into slot inner (J) fixture body in sequence slightly (Note: End of small crystal should add the gasket). Close the end cap and lock the screws. (Installation Map on Page 1)

Note: There is one 3 CCT Switch for 3000k-3500k-4000k adjustable which is wrapped in a black heat-resistant casing. Please adjust to the color you like before using.

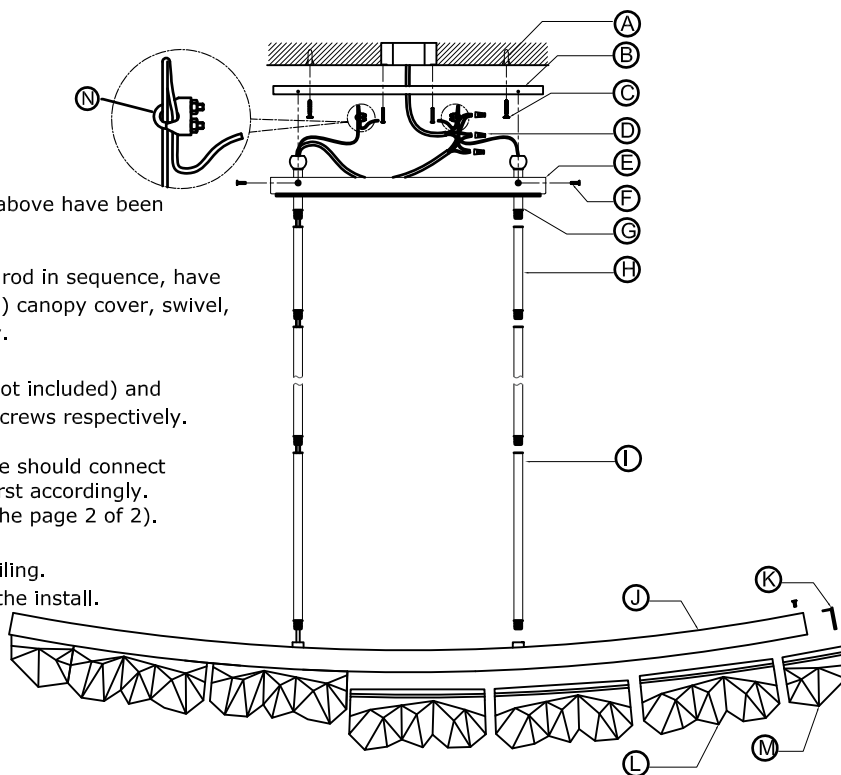

PL11617/LED-56/AGB, PL11618/LED-56/MW, PL11619/LED-56/PN,
PL11620/LED-56/SBB
Assembly and Installation Instructions

Detailed wire connection drawing
(Connect the wires on canopy to the wires on fixture body marked with same labels accordingly.)

