


# **ZEDV**

## **L I G H T I N G**

### **ASSEMBLY AND INSTALLATION INSTRUCTIONS**

**ITEM NO.: WS70039/6/AGB**


**ITEM NO.: WS70040/6/PN**

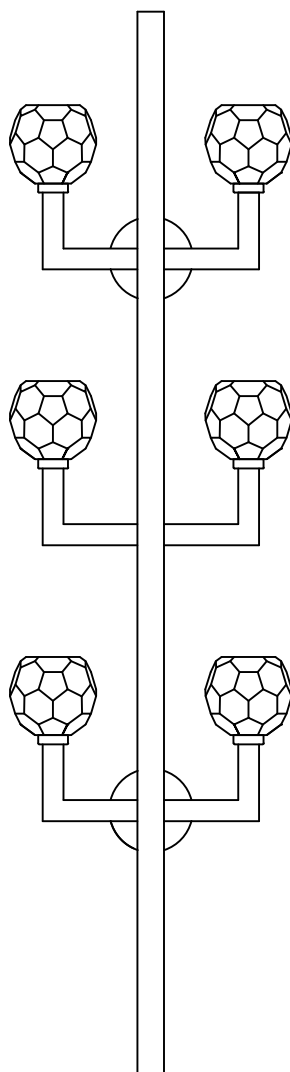

**NOTE:** Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

**STEP 1:**

Lock cable steel(C) on to junction box with self screws screw(E) & washer , and hang one end cable steel onto screw (E). Then Secure the Mounting plate (B1) onto junction box by 2pcs box screws(A)

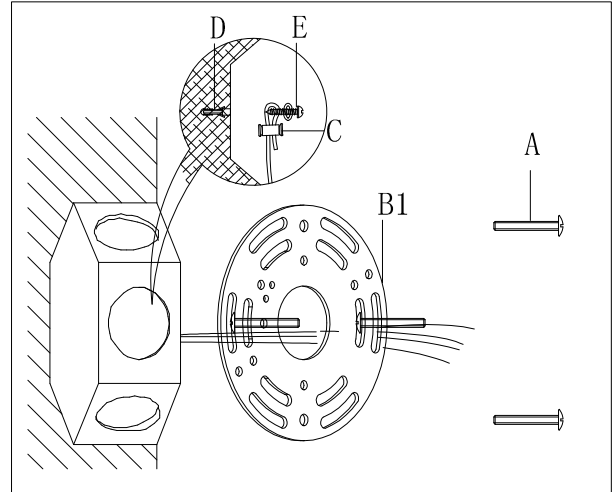



**STEP 2:**

Secure the Mounting plate (B2) onto the wall by 2pcs box screws(E), and hang the other end of cable steel (C) onto the metal (1) of back-plate.

**STEP 3: Wire connections**

Wrap the Ground wire from the fixture around the screw on the mounting plate.

Connect the white wire from the fixture to the white wire (Neutral wire) from Junction box with wire connector(F)  
Connect the Black wire from the fixture to the black wire (Live wire) from junction box with wire connector(F)

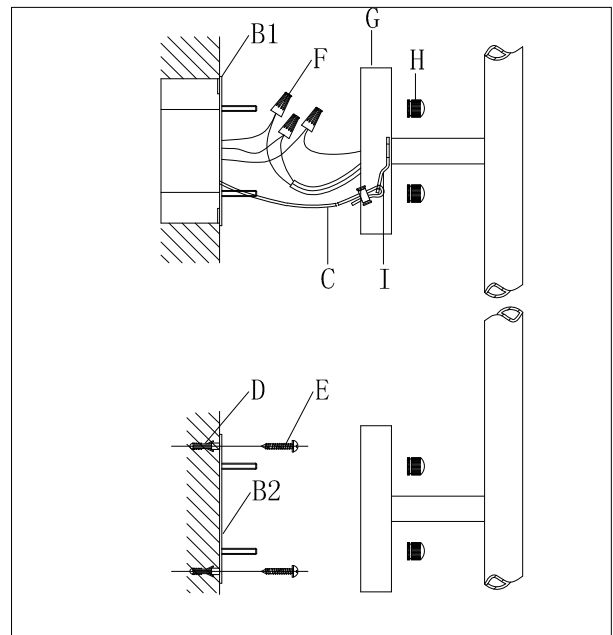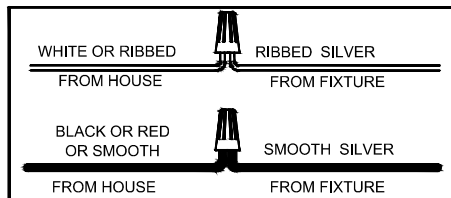

**STEP 4:**


Align the back plates(G) with the mounting plates(B1, B2), the mounting screws from mounting plate pass through the back plate holes secured tight with 4 cap finials(H) on the mounting screws.

**STEP 5:**

Assemble the crystal shadel(K) onto the metal holder(I), insert 6pcs G9 bulb (J not included) into the socket. When assemble or take off of the crystal, use your hand to hold the lamp body to prevent crystal falling.

**STEP 6:**


Connect breaker and turn on Light.

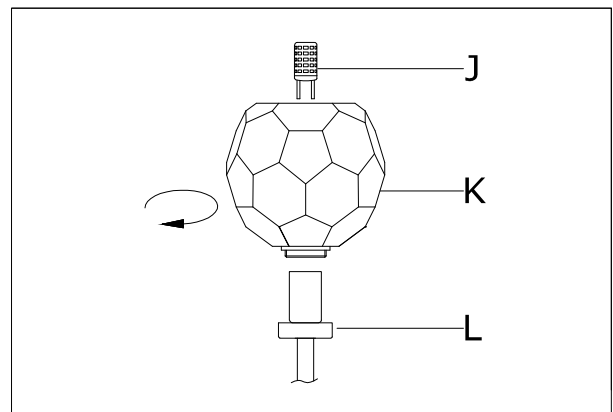

**Cleaning & Care:**

To clean, wipe the Fixture with a soft, dry cloth.  
Avoid the use of harsh or abrasive chemicals as they may damage the finish.

# SAFETY CABLE ASSEMBLY

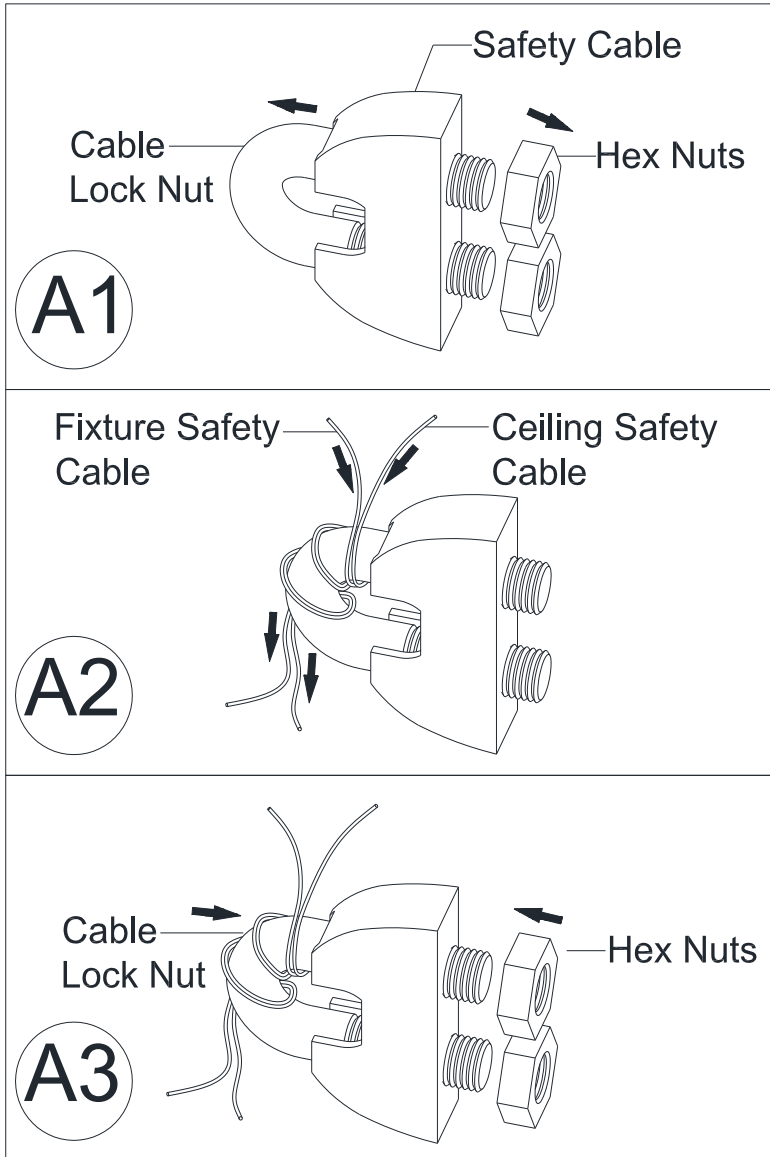

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.

2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.

3. Secure by tightening both Hex Nuts until tight.