


PL11725/LED-3/AGB PL11726/LED-3/MW PL11727/LED-3/PN PL11728/LED-3/SBB Assembly and Installation Instructions

WARNINGS AND CAUTIONS FOR ALL BELOW

1. Fully read these instructions before starting installation, keep installation instructions for future references.
2. Installation is to be performed by a licensed electrician in accordance with the National Electrical Code (NEC) and local authoritative regulations.
3. To prevent electrical shock or hazards ensure electricity is powered off at circuit breaker before re-lamping or wiring of the fixture. Do not install without properly powering off designated area for fixture to be installed.
4. This product is designed to be mounted on a correctly installed standard round or octagon junction box.
5. May require 2 people for installation.


ASSEMBLY INSTRUCTIONS - PENDANT

1. Remove fixture from its original packaging, verify all components and complete a visual inspection.
 - A. Anchors (4)
 - B. Mounting plate(1)
 - C. Mounting plate screws (2)
 - D. Self-tapping screws (4)
 - E. Wire nuts (3)
 - F. Canopy (1)
 - G. 3" suspension stems (2)
 - H. Canopy secure rings (2)
 - I. 6" suspension stems (2)
 - J. 12" suspension stems(6)
 - K. Light frame (1)
 - L. Glass shades (2)
2. Pre-plan, make sure all Warnings and Cautions above have been completed.
3. Install the mounting plate(B)to junction box with mounting plate screw(C)and make a remark,drill holes after removing the mounting plate,insert the anchor(A)to the ceiling,then install the mounting plate to the ceiling with mounting plate screw and self-tapping screw(D).
4. Connect a stem with 3"suspension stem(G),6"suspension stem(H) ,12"suspension stems(I),pass the power wire through connected suspension stem,canopy secure ring(H),canopy(F), and the side hole of mounting plate,connect one end of stem to light frame(K) and the other end to the swivel.
5. Before connect the input wires from the house we should connect the wires on canopy to the wires on fixture body first accordingly.(Detailed wire connection drawing please refer to the page 2 of 2).
6. You are now ready to install the fixture to the ceiling.
 - Connect all the wires and ground using (E) wire connectors by twisting matching wires as below
 - Ground Wire (G, Green or Copper Wire) Green to Green or Copper to Green or Copper to Copper from junction box.
 - Live Wire (L, Black) Black to Black Wire from junction box.
 - Neutral Wire (N, White) White to White Wire from junction box.
 - Once all connected, proceed to next step.
7. Cover the mounting plate with canopy,fix the canopy with canopy secure ring.
8. Install glass shade(L),installation is completed,turn on the light fixture.
9. You are ready to enjoy your light fixture now,thank you from Zeev Lighting.

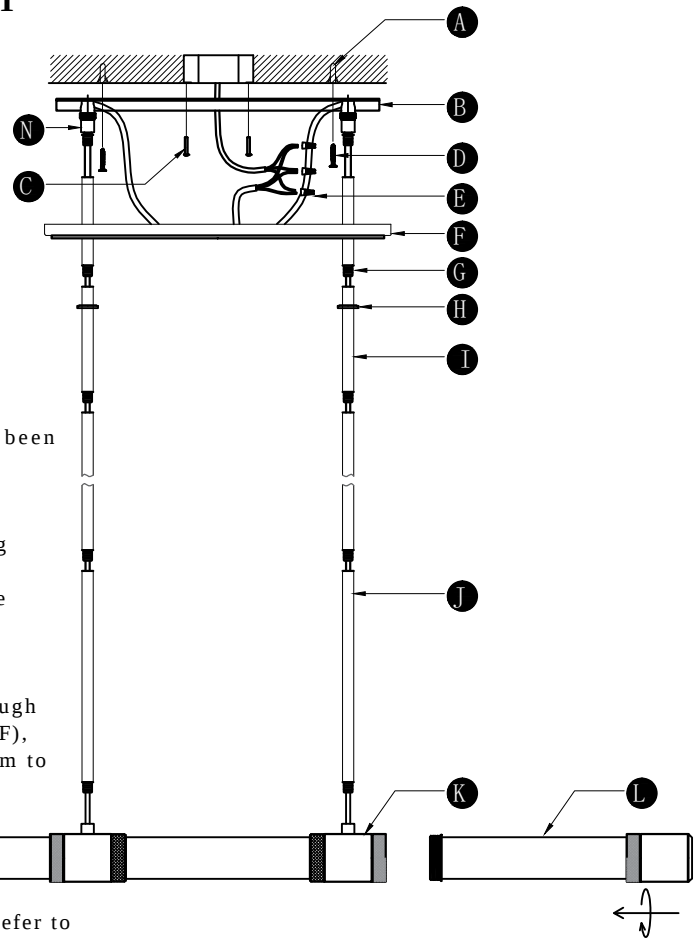


PL11725/LED-3/AGB PL11726/LED-3/MW PL11727/LED-3/PN PL11728/LED-3/SBB Assembly and Installation Instructions

Detailed wire connection drawing
(Connect the wires on canopy to the wires on fixture body marked with same labels accordingly.)

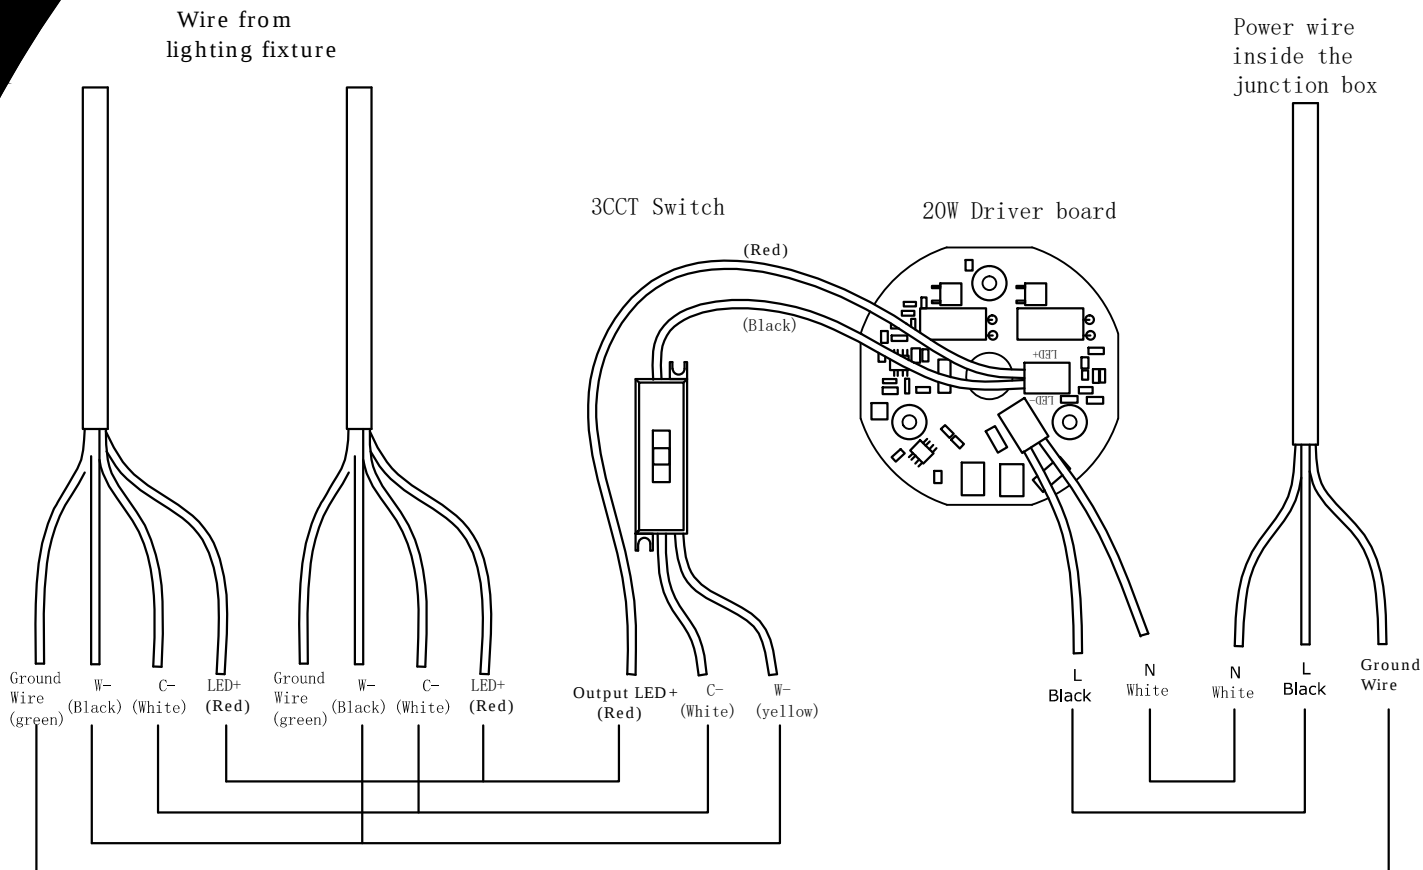

SAFETY CABLE ASSEMBLY

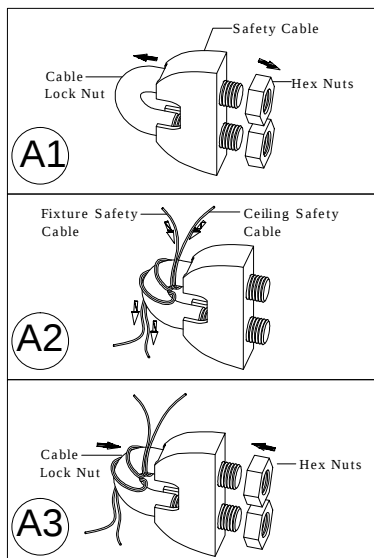

1. Remove Hex Nut from Cable Lock Nut and pull Cable Lock Nut from Safety Cable.
2. Join Fixture Safety Cable with safety cable from ceiling and wrap both safety cables around the Cable Lock Nut.
3. Secure by tightening both Hex Nuts until tight.